



**CMDZ5221B  
THRU  
CMDZ5261B**

**SUPER-MINI ZENER DIODE  
2.4 VOLTS THRU 47 VOLTS  
250mW, 5% TOLERANCE**

**SUPER<sup>TM</sup>  
mini**



**SOD-323 CASE**

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMDZ5221B Series Silicon Zener Diode is a high quality voltage regulator, manufactured in a super-mini surface mount package, designed for use in industrial, commercial, entertainment and computer applications.

**ABSOLUTE MAXIMUM RATINGS:**

Power Dissipation (@ $T_A=25^\circ\text{C}$ )  
Operating and Storage Temperature  
Thermal Resistance

**SYMBOL**

$P_D$  250  
 $T_J, T_{stg}$  -65 to +150  
 $\Theta_{JA}$  500

**UNIT**

mW  
 $^\circ\text{C}$   
 $^\circ\text{C/W}$


**ELECTRICAL CHARACTERISTICS: ( $T_A=25^\circ\text{C}$ ),  $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$  FOR ALL TYPES.**

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDENCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT
	MIN	NOM	MAX		$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$	
	VOLTS	VOLTS	VOLTS	mA	$\Omega$	$\Omega$	mA	$\mu\text{A}$	VOLTS	%/ $^\circ\text{C}$
CMDZ5221B	2.280	2.4	2.520	20	30	1200	0.25	100	1.0	-0.085
CMDZ5222B	2.375	2.5	2.625	20	30	1250	0.25	100	1.0	-0.085
CMDZ5223B	2.565	2.7	2.835	20	30	1300	0.25	75	1.0	-0.080
CMDZ5224B	2.660	2.8	2.940	20	30	1400	0.25	75	1.0	-0.080
CMDZ5225B	2.850	3.0	3.150	20	29	1600	0.25	50	1.0	-0.075
CMDZ5226B	3.135	3.3	3.465	20	28	1600	0.25	25	1.0	-0.070
CMDZ5227B	3.420	3.6	3.780	20	24	1700	0.25	15	1.0	-0.065
CMDZ5228B	3.705	3.9	4.095	20	23	1900	0.25	10	1.0	-0.060
CMDZ5229B	4.085	4.3	4.515	20	22	2000	0.25	5.0	1.0	$\pm 0.055$
CMDZ5230B	4.465	4.7	4.935	20	19	1900	0.25	5.0	2.0	$\pm 0.030$
CMDZ5231B	4.845	5.1	5.355	20	17	1600	0.25	5.0	2.0	$\pm 0.030$
CMDZ5232B	5.320	5.6	5.880	20	11	1600	0.25	5.0	3.0	+0.038
CMDZ5233B	5.700	6.0	6.300	20	7.0	1600	0.25	5.0	3.5	+0.038
CMDZ5234B	5.890	6.2	6.510	20	7.0	1000	0.25	5.0	4.0	+0.045
CMDZ5235B	6.460	6.8	7.140	20	5.0	750	0.25	3.0	5.0	+0.050
CMDZ5236B	7.125	7.5	7.875	20	6.0	500	0.25	3.0	6.0	+0.058
CMDZ5237B	7.790	8.2	8.610	20	8.0	500	0.25	3.0	6.5	+0.062
CMDZ5238B	8.265	8.7	9.135	20	8.0	600	0.25	3.0	6.5	+0.065
CMDZ5239B	8.645	9.1	9.555	20	10	600	0.25	3.0	7.0	+0.068
CMDZ5240B	9.500	10	10.50	20	17	600	0.25	3.0	8.0	+0.075
CMDZ5241B	10.45	11	11.55	20	22	600	0.25	2.0	8.4	+0.076
CMDZ5242B	11.40	12	12.60	20	30	600	0.25	1.0	9.1	+0.077

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^{\circ}\text{C}$ ),  $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$  FOR ALL TYPES.

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$			TEST CURRENT	MAXIMUM ZENER IMPEDENCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER VOLTAGE TEMPERATURE COEFFICIENT
	MIN	NOM	MAX		$I_{ZT}$	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$	
	VOLTS	VOLTS	VOLTS	mA	$\Omega$	$\Omega$	mA	$\mu\text{A}$	VOLTS	%/°C
CMDZ5243B	12.35	13	13.65	9.5	13	600	0.25	0.5	9.9	+0.079
CMDZ5244B	13.30	14	14.70	9.0	15	600	0.25	0.1	10	+0.082
CMDZ5245B	14.25	15	15.75	8.5	16	600	0.25	0.1	11	+0.082
CMDZ5246B	15.20	16	16.80	7.8	17	600	0.25	0.1	12	+0.083
CMDZ5247B	16.15	17	17.85	7.4	19	600	0.25	0.1	13	+0.084
CMDZ5248B	17.10	18	18.90	7.0	21	600	0.25	0.1	14	+0.085
CMDZ5249B	18.05	19	19.95	6.6	23	600	0.25	0.1	14	+0.086
CMDZ5250B	19.00	20	21.00	6.2	25	600	0.25	0.1	15	+0.086
CMDZ5251B	20.90	22	23.10	5.6	29	600	0.25	0.1	17	+0.087
CMDZ5252B	22.80	24	25.20	5.2	33	600	0.25	0.1	18	+0.088
CMDZ5253B	23.75	25	26.25	5.0	35	600	0.25	0.1	19	+0.089
CMDZ5254B	25.65	27	28.35	4.6	41	600	0.25	0.1	21	+0.090
CMDZ5255B	26.60	28	29.40	4.5	44	600	0.25	0.1	21	+0.091
CMDZ5256B	28.50	30	31.50	4.2	49	600	0.25	0.1	23	+0.091
CMDZ5257B	31.35	33	34.65	3.8	58	700	0.25	0.1	25	+0.092
CMDZ5258B	34.20	36	37.80	3.4	70	700	0.25	0.1	27	+0.093
CMDZ5259B	37.05	39	40.95	3.2	80	800	0.25	0.1	30	+0.094
CMDZ5260B	40.85	43	45.15	3.0	93	900	0.25	0.1	33	+0.095
CMDZ5261B	44.65	47	49.35	2.7	105	1000	0.25	0.1	36	+0.095

All dimensions in inches (mm).

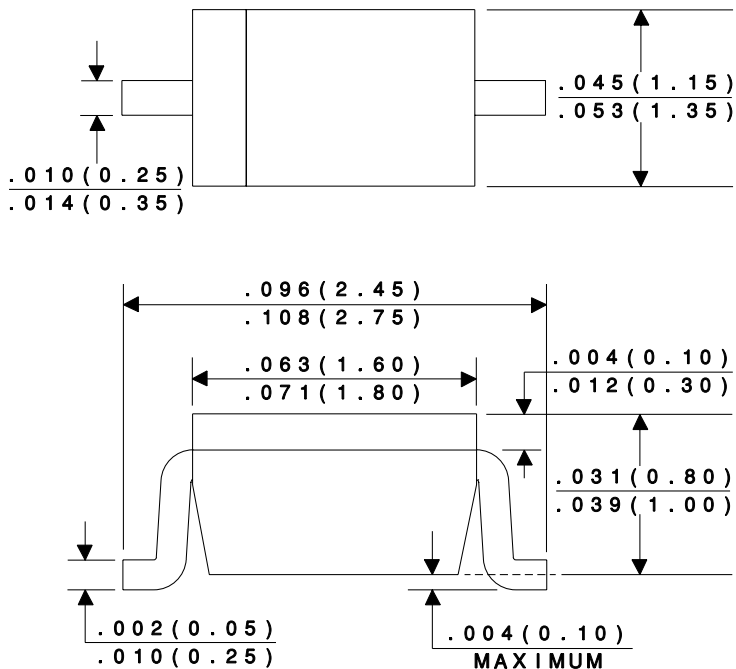



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.