


## T-1¼ Subminiature Lamps

Line No.	Part No. Wire Lead	Part No. Miniature Flanged	Part No. Bi-Pin	Volts	Amps	M.S.C.P.	Filament Type	Life Hours
13	2135	7302	7306	1.3	0.030	0.006	S-2	100
14	8631	8636	7636	1.35	0.060	0.006	C-2R	500
15	<b>8655</b>	<b>8656</b>	<b>7307</b>	2.5	0.400	0.55	C-2R	30
16	324	8637	<b>7637</b>	3.0	0.190	0.25	C-2R	350
17	8816	7305	<b>7308</b>	4.5	0.285	0.80	C-2R	100
18	580	3582	7580	5.0	0.060	0.03	C-2R	100,000
19	<b>583</b>	3585	<b>7583</b>	5.0	0.060	0.05	C-2R	100,000
20	<b>515</b>	3518	<b>7515</b>	5.0	0.115	0.15	C-2R	40,000
21	8661	8660	<b>7660</b>	6.0	0.040	0.06	C-2R	1,000
22	2114	8541	<b>7309</b>	6.0	0.060	0.13	C-2R	3,000
23	<b>634</b>	<b>8628</b>	<b>7628</b>	6.0	0.200	0.63	C-2R	1,000
24	<b>8610</b>	8551	<b>7310</b>	6.3	0.200	0.55	C-2R	5,000
25	8608	8609	7311	10.0	0.070	0.14	C-2F	10,000
26	<b>8640</b>	8646	<b>7646</b>	14.0	0.080	0.50	C-2F	1,000
27	<b>8627</b>	8632	<b>7632</b>	28.0	0.040	0.32	C-2F	1,000



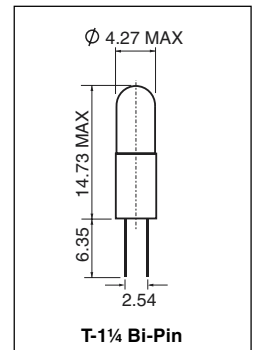

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.