

(2) DIFFERENTIAL AMPLIFIER APPLICATIONS

Type No.	VGDS (V)	IG (mA)	PD (mW)	Tj (°C)	IDSS* (mA)	Yfs		ΔVGS=[VGs1 - VGs2]		Δ[VGS1-VGS2] ΔTa		PACKAGE
						VDS (V)	VGS (V)	(ms)	(mV)	(Note) (μV/°C)	VDS (V)	
N-Channel												
2SK18	-40	10	200	150	0.45~2.8	10	0.8~3.0	10	10MAX.	10	0.2	(2-9C1A)
2SK18A	-40	10	200	150	0.45~2.8	10	0.8~3.0	10	10MAX.	10	0.2	(2-9C1A)
2SK72	-20	10	200	150	0.60~6.5	10	1.5~6.5	10	10MAX.	10	0.2	(2-9C1B)

* IDSS Classified (Note) $\frac{\Delta[VGS1-VGS2]}{\Delta Ta}$ Guaranteed Ta=0~60°C

** Matched Pairs are Available: ΔIDSS < 10%, ΔVGS < 20mV

DUAL TYPE

Similar to 2SK15

Similar to 2SK15

Similar to 2SK48

(3) OTHER APPLICATIONS

Application




Medical Electronic Equipment

Video Pre-Amplifier

VHF Band Amplifier

Type No.	VGDS (V)	IG (mA)	PD (mW)	Tj (°C)	IDSS (mA)	VDS (V)	Main Electrical Characteristics		PACKAGE
							Yfs	GR	
N-Channel									
2SK48	-20	10	100	150	0.3~3.0	10	NF=5dB MAX. @VDS=10V, ID=450μA, Rg=100kΩ, f=120Hz		TO-17
3SK28	-10	10	200	150	3.7~22*	10	GPS=17dB MIN. @VDD=10V VG2S=0 f=100MHz		TO-72

* Y : 3.7~7.5 GR : 6.5~13.0 BL : 11.0~22.0

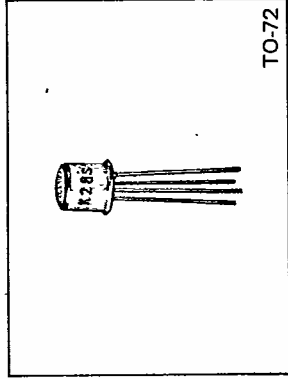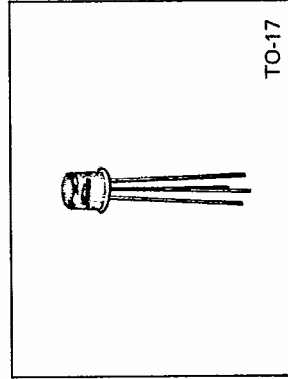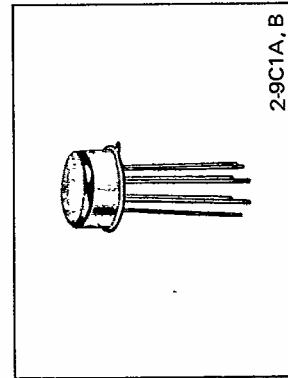

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.