

SOT223 NPN SILICON PLANAR MEDIUM POWER HIGH GAIN TRANSISTOR

ISSUE 3 - OCTOBER 1995

FZT692B


FEATURES

- * High Gain + Very low saturation voltage

APPLICATIONS

- * Darlington replacement
- * Relay drivers, DC-DC converters

PARTMARKING DETAIL - FZT692B



ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Collector-Base Voltage	V_{CBO}	70	V
Collector-Emitter Voltage	V_{CEO}	70	V
Emitter-Base Voltage	V_{EBO}	5	V
Peak Pulse Current	I_{CM}	5	A
Continuous Collector Current	I_C	2	A
Power Dissipation at $T_{amb}=25^{\circ}C$	P_{tot}	2	W
Operating and Storage Temperature Range	$T_j; T_{stg}$	-55 to +150	$^{\circ}C$

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}C$)


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS.
Breakdown Voltages	$V_{(BR)CBO}$	70			V	$I_C=100\mu A$
	$V_{(BR)CEO}$	70			V	$I_C=10mA^*$
	$V_{(BR)EBO}$	5			V	$I_E=100\mu A$
Cut-Off Currents	I_{CBO}			0.1	μA	$V_{CB}=55V$
	I_{EBO}			0.1	μA	$V_{EB}=4V$
Saturation Voltages	$V_{CE(sat)}$			0.15	V	$I_C=0.1A, I_B=0.5mA^*$
				0.5	V	$I_C=1A, I_B=10mA^*$
				0.5	V	$I_C=2A, I_B=200mA^*$
	$V_{BE(sat)}$			0.9	V	$I_C=1A, I_B=10mA^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$			0.9	V	$I_C=1A, V_{CE}=2V^*$
Static Forward Current Transfer Ratio	h_{FE}	500 400 150				$I_C=100mA, V_{CE}=2V^*$ $I_C=500mA, V_{CE}=2V^*$ $I_C=1A, V_{CE}=2V^*$
Transition Frequency	f_T	150			MHz	$I_C=50mA, V_{CE}=5V, f=50MHz$
Input Capacitance	C_{ibo}		200		pF	$V_{EB}=0.5V, f=1MHz$
Output Capacitance	C_{obo}		12		pF	$V_{CB}=10V, f=1MHz$
Switching Times	t_{on}		46		ns	$I_C=500mA, I_{B1}=50mA$
	t_{off}		1440		ns	$I_{B2}=50mA, V_{CC}=10V$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$

Spice parameter data is available upon request for this device

FZT692B

TYPICAL CHARACTERISTICS

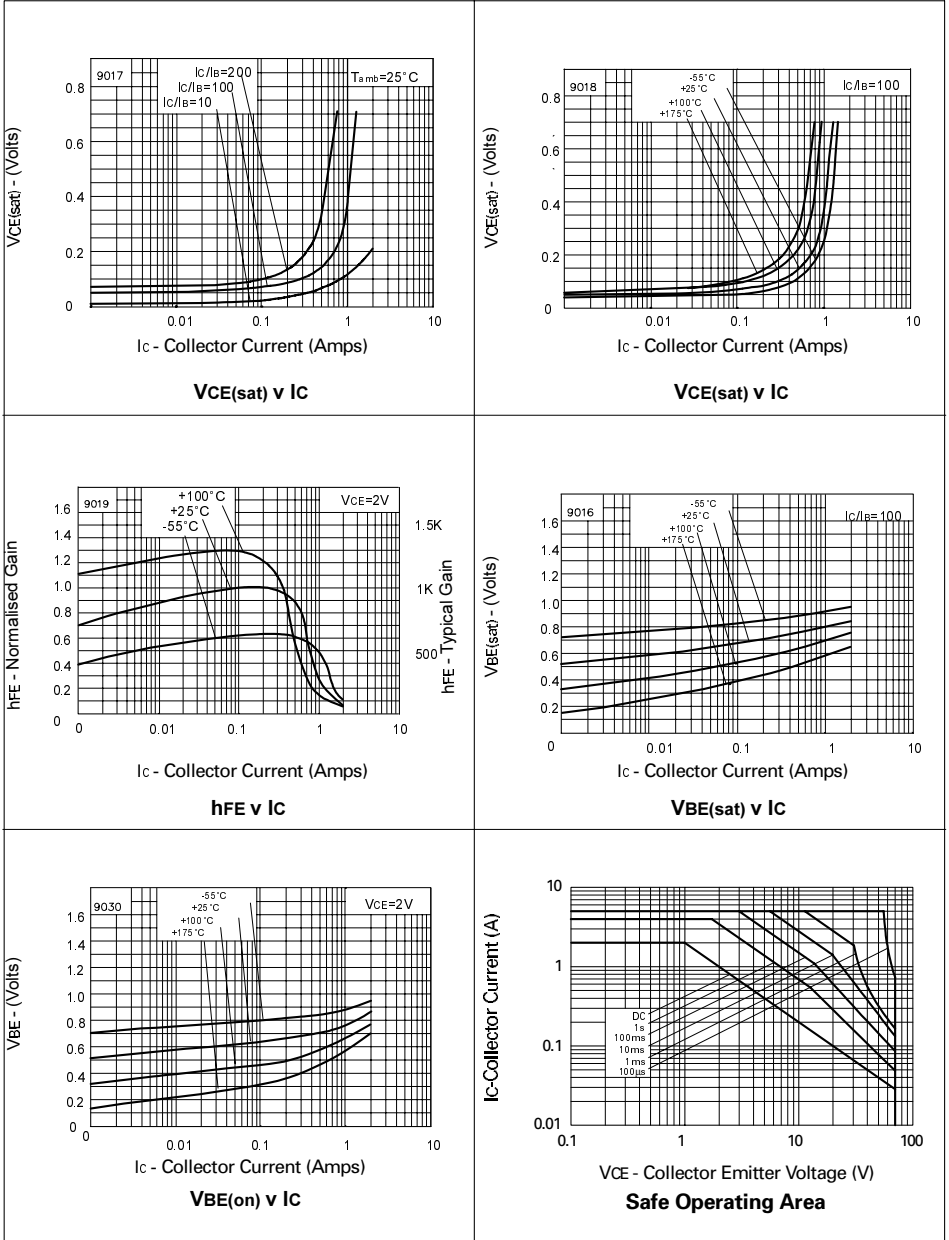



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.