


Use Advantages

Used as a general purpose rectifier in power supplies, or for clipping and steering applications.
 High performance alternative to small signal diodes where space does not permit use of power rectifiers.
 May be used in hostile environments where hermeticity and reliability are important i.e. (Military and Aero/Space). MIL-S- 19500/ 240 approvals. Available up to JANTXV-1 level.
 "S" level screening capability to Source Control Drawings.

Features

- Six Sigma quality
- Humidity proof glass
- Metallurgically bonded
- Thermally matched system
- No thermal fatigue
- High surge capability
- Sigma Bond™ plated contacts
- 100% guaranteed solderability
- (DO-213AA) SMD MELF commercial (LL) and MIL (UR-1) types available

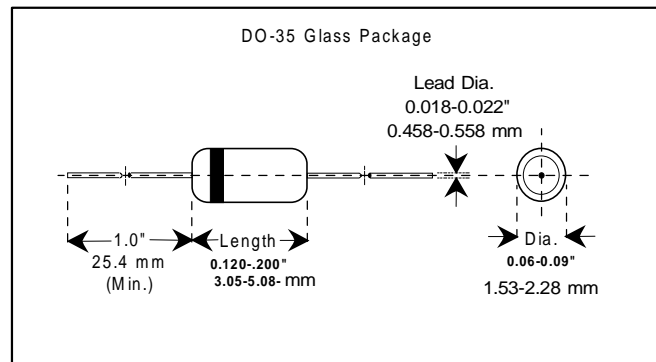

Absolute Maximum Ratings	Symbol	Value	Unit
Power Dissipation at 3/8" from the body, $T_L = 75^\circ\text{C}$	P_{tot}	600	mWatts
Average Forward Rectified Current at $T_L = 75^\circ\text{C}$	I_{AV}	400	mAmps
Operating and Storage Temperature Range	$T_{O\&S}$	-65 to 175	$^\circ\text{C}$
Thermal Impedance	$Z_{\theta JX}$	35	$^\circ\text{C/W}$


Detail Specifications

Type	Reverse Voltage	Breakdown Voltage (MIN.) @ 100 μA	Maximum Average Rectified Current		Forward Voltage Drop	Maximum Reverse Leakage Current		Maximum Surge Current	Typical Junction Capacitance
	(V_R)	(B_V)	(I_O) 25 $^\circ\text{C}$	(I_O) 150 $^\circ\text{C}$	(V_F) @ $I_F = 400\text{mA}$	(I_R) @ V_R 25 $^\circ\text{C}$	(I_R) @ V_R 100 $^\circ\text{C}$	(I_{FSM}) (NOTE 1)	@ -12V (C_O)
	Volts	Volts	Amps	Amps	Volts	μA	μA	Amps	pF
1N645,-1	225	275	0.4	0.15	1.0	0.2	15	3	9
1N646,-1	300	360	0.4	0.15	1.0	0.2	15	3	9
1N647,-1	400	480	0.4	0.15	1.0	0.2	20	3	9
1N648,-1	500	600	0.4	0.15	1.0	0.2	20	3	9
1N649,-1	600	720	0.4	0.15	1.0	0.2	25	3	9

Note 1: Surge Current @ $T_A = +25^\circ\text{C}$ to $+150^\circ\text{C}$, for 1 Second


For MELF DO-213AA surface mount package, replace "1N" prefix with "LL" for commercial.

DO-35 DERATING (175 C Tj)

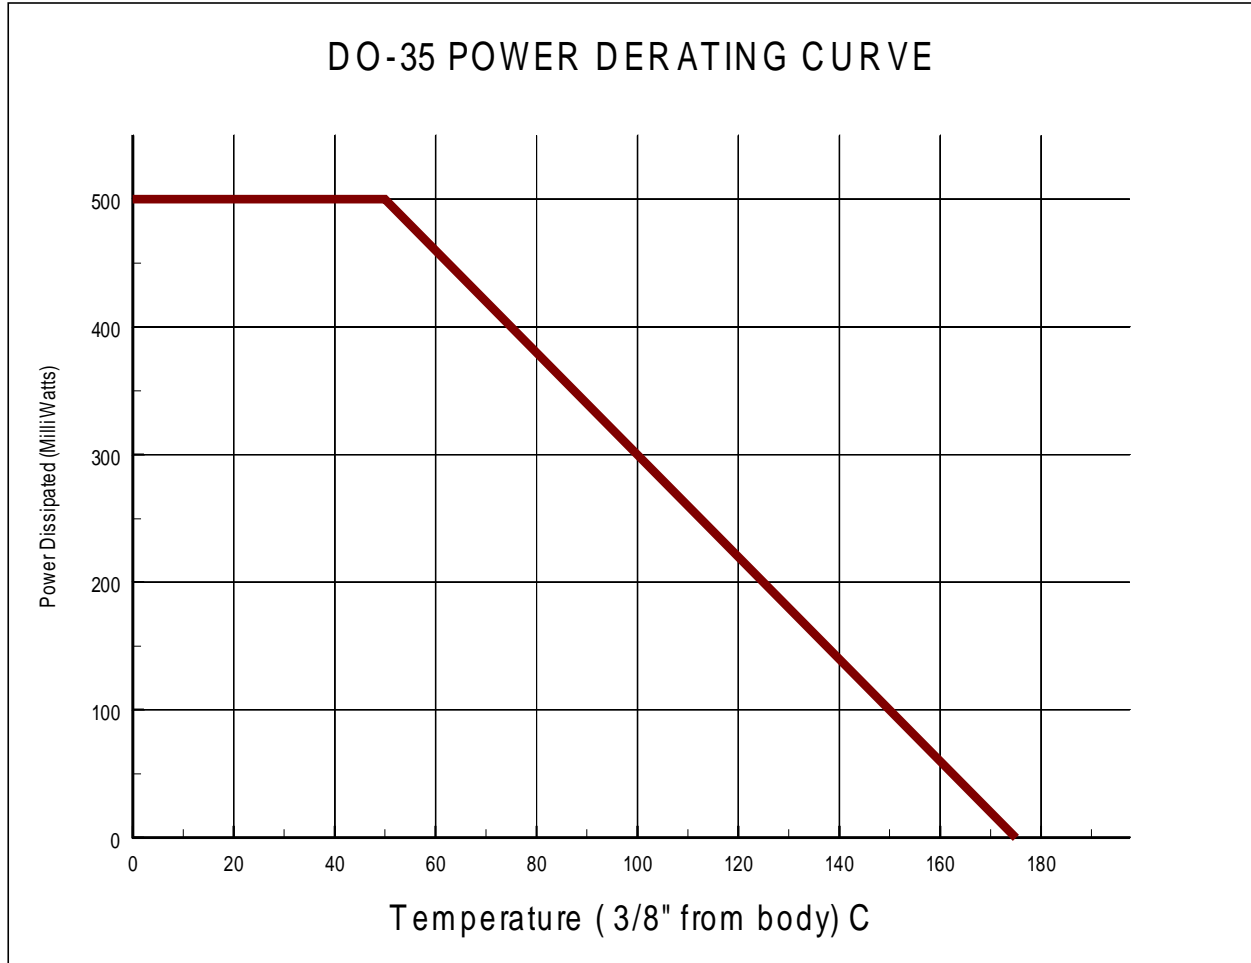

Silicon Rectifier Diodes

1N645-1 thru 1N649-1

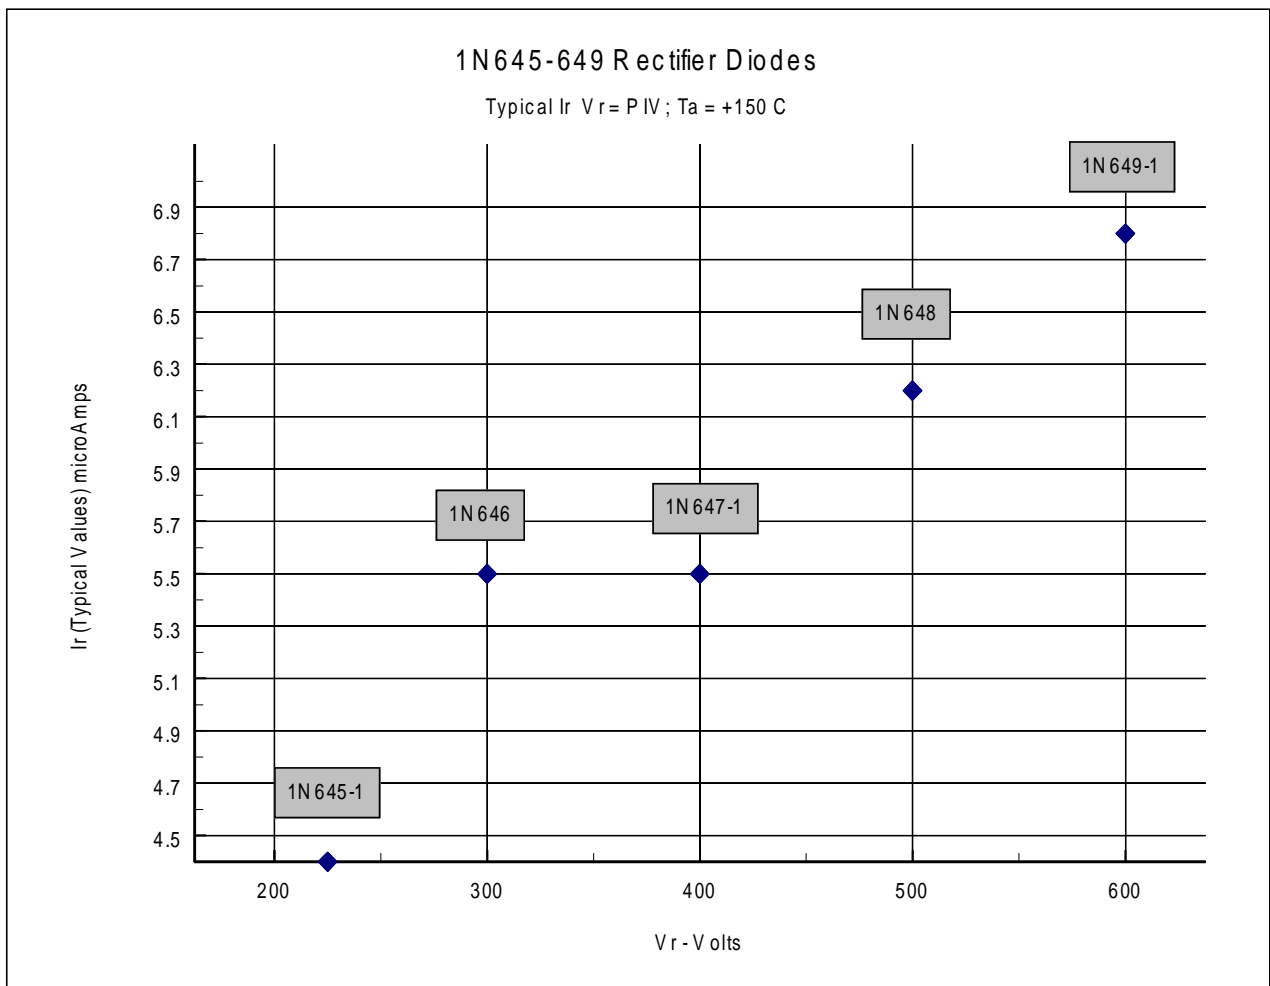



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.