

FAST RECOVERY POWER RECTIFIER

Qualified per MIL-PRF-19500/478

Devices

1N5812	1N5814	1N5815	1N5816
1N5812R	1N5814R	1N5815R	1N5816R

Qualified Level

JAN
JANTX
JANTXV


MAXIMUM RATINGS

Ratings	Symbol	1N5812 1N5812R	1N5814 1N5814R	1N5816 1N5816R	Unit
Reverse Voltage	V_R	50	100	150	Vdc
Working Peak Reverse Voltage	V_{RWM}	50	100	150	Vpk
Average Forward Current $T_C = +100^{\circ}\text{C}$ ⁽¹⁾	I_O	20			Adc
Forward Current Surge Peak $T_C = +100^{\circ}\text{C}$ $t_p = 8.3$ ms	I_{FSM}	400			Adc
Reverse Recovery Time	t_{rr}	35			ns
Operating & Storage Junction Temperature	T_J, T_{stg}	-65 to +175			$^{\circ}\text{C}$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.5	$^{\circ}\text{C}/\text{W}$

1) Derate linearly 250 mA/ $^{\circ}\text{C}$ from +100 $^{\circ}\text{C}$ to +150 $^{\circ}\text{C}$, & 300 mA/ $^{\circ}\text{C}$ above +150 $^{\circ}\text{C}$

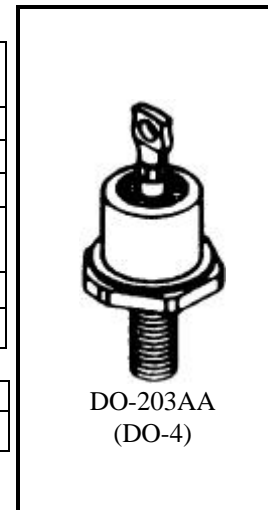

*See appendix A for package outline

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Min.	Max.	Unit
Thermal Impedance $I_H \geq \text{rated } I_O; t_H \leq 250\text{ms}; 10\text{ mA} \leq I_M \leq 100\text{ mA}; t_{MD} = 250\ \mu\text{s (max)}$	$Z_{\theta JX}$		1.35	$^{\circ}\text{C}/\text{W}$
Forward Voltage $t_p \leq 8.3$ ms, duty cycle $\leq 2.0\%$ pulsed $I_F = 10$ A (pk) $I_F = 20$ A (pk)	V_{F1} V_{F2}		0.860 0.950	Vdc Vpk
Reverse Current $V_R = \text{Rated } V_R$ (See 1.3 of MIL-PRF-19500/478)	I_R		10	μAdc
Breakdown Voltage $I_R = 100\ \mu\text{Adc}$ $I_R = 100\ \mu\text{Adc}$ $I_R = 100\ \mu\text{Adc}$	$V_{(BR)}$	60 110 160		Vdc
Junction Capacitance $V_R = 10$ Vdc, $V_{SIG} = 50$ mVdc (p-p) max, $f = 1.0$ MHz	C_J		300	pF
Forward Recovery Voltage $t_p \geq 20$ ns, $t_r = 8.0$ ns; $I_F = 1,000$ mA	V_{FR}		2.2	V(pk)
Forward Recovery Time $I_F = 1,000$ mA	t_{rr}		15	ns



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.