


7ch switching regulator controller BD9713KV

● Description

BD9713KV is a PWM switching regulator controller IC. 7 channel switching regulator controllers are incorporated into a VQFP48 package. This IC can drive external P-channel FET directly. Reference voltage, triangular wave oscillator, PWM comparator, CMOS type driver, short-circuit protection circuit, and under voltage lock out circuit are all incorporated in this IC.

● Dimension (Unit : mm)

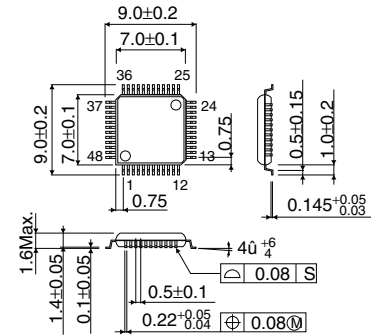

VQFP48

● Features

- 1) 7-channel driver for main switch are incorporated and P-Ch FET can be driven directly.
- 2) Built-in short circuit protection (Timer latch type) when over loaded
- 3) Built-in under voltage lock out circuit
- 4) All channels can be OFF or 5, 6, 7 channels can be set OFF independently.
- 5) Circuit current is 10 A or less, when all channels are OFF.
- 6) Built-in high-precision reference voltage circuit ($\pm 1\%$)

● Applications

Movie, DVC

● Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	Vcc	15	V
Power dissipation	Pd	600	mW
Operating temperature range	Topr	Ð20 ~ +85	°C
Storage temperature range	Tstg	Ð55 ~ +125	°C

Derating : 6.0mW/°C for operation above Ta=25°C



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.