


**CMPZ4614
THRU
CMPZ4627**

**350mW LOW NOISE ZENER DIODE
5% TOLERANCE**



SOT-23 CASE

DESCRIPTION:

The CENTRAL SEMIONDUCTOR CMPZ4614 Series Silicon Zener Diode is high quality voltage regulator designed for low leakage, low current and low noise applications.



ELECTRICAL CHARACTERISTICS

($T_A=25^{\circ}\text{C}$) $V_F=1.0$ MAX @ $I_F=200\text{mA}$ FOR ALL TYPES.

TYPE NO.	ZENER VOLTAGE	TEST CURRENT	MAXIMUM ZENER IMPEDANCE	MAXIMUM REVERSE LEAKAGE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM NOISE DENSITY
	$V_Z @ I_{ZT}$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$I_R @ V_R$		I_{ZM}	$N_D @ I_{ZT}=250\mu\text{A}$
	VOLTS	μA	Ω	μA	VOLTS	mA	$\mu\text{V}/\sqrt{\text{Hz}}$
CMPZ4614*	1.8	250	1200	7.5	1.0	120	1.0
CMPZ4615*	2.0	250	1250	5.0	1.0	110	1.0
CMPZ4616*	2.2	250	1300	4.0	1.0	100	1.0
CMPZ4617*	2.4	250	1400	2.0	1.0	95	1.0
CMPZ4618*	2.7	250	1500	1.0	1.0	90	1.0
CMPZ4619*	3.0	250	1600	0.8	1.0	85	1.0
CMPZ4620*	3.3	250	1650	7.5	1.5	80	1.0
CMPZ4621*	3.6	250	1700	7.5	2.0	75	1.0
CMPZ4622*	3.9	250	1650	5.0	2.0	70	1.0
CMPZ4623*	4.3	250	1600	4.0	2.0	65	1.0
CMPZ4624*	4.7	250	1550	10	3.0	60	1.0
CMPZ4625*	5.1	250	1500	10	3.0	55	2.0
CMPZ4626*	5.6	250	1400	10	4.0	50	4.0
CMPZ4627*	6.2	250	1200	10	5.0	45	5.0

* Available on special order only, please consult factory.

All dimensions in inches (mm).

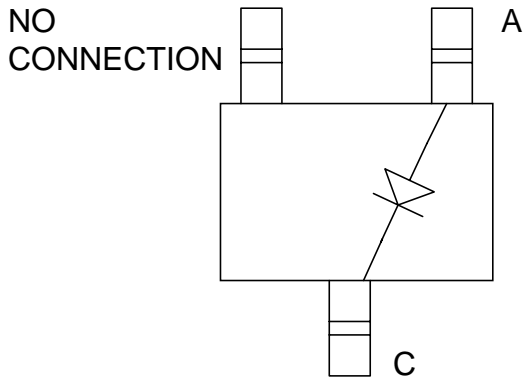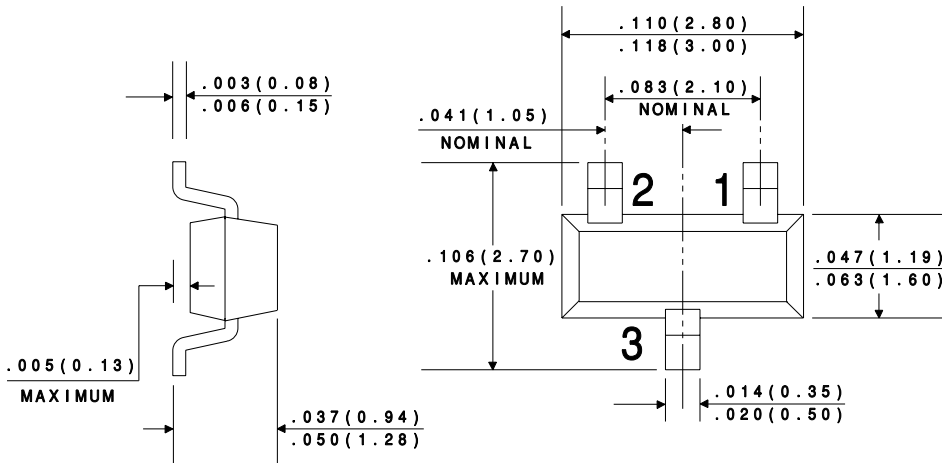



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.