


### IGBT Power Module

- Half-bridge
- Including fast free-wheeling diodes
- Package with insulated metal base plate

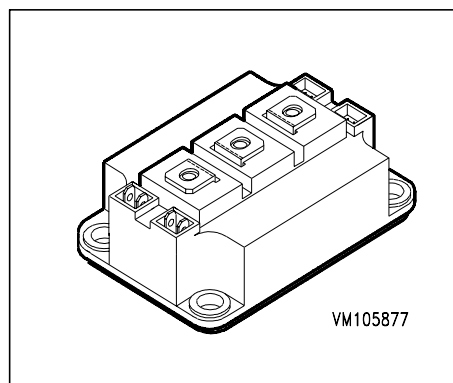

| Type               | $V_{CE}$ | $I_C$ | Package       | Ordering Code    |
|--------------------|----------|-------|---------------|------------------|
| BSM 100 GB 120 DN2 | 1200V    | 150A  | HALF-BRIDGE 2 | C67076-A2107-A70 |

### Maximum Ratings

| Parameter                                     | Symbol      | Values        | Unit               |
|-----------------------------------------------|-------------|---------------|--------------------|
| Collector-emitter voltage                     | $V_{CE}$    | 1200          | V                  |
| Collector-gate voltage                        | $V_{CGR}$   |               |                    |
| $R_{GE} = 20\text{ k}\Omega$                  |             | 1200          |                    |
| Gate-emitter voltage                          | $V_{GE}$    | $\pm 20$      |                    |
| DC collector current                          | $I_C$       |               | A                  |
| $T_C = 25\text{ }^{\circ}\text{C}$            |             | 150           |                    |
| $T_C = 80\text{ }^{\circ}\text{C}$            |             | 100           |                    |
| Pulsed collector current, $t_p = 1\text{ ms}$ | $I_{Cpuls}$ |               |                    |
| $T_C = 25\text{ }^{\circ}\text{C}$            |             | 300           |                    |
| $T_C = 80\text{ }^{\circ}\text{C}$            |             | 200           |                    |
| Power dissipation per IGBT                    | $P_{tot}$   |               | W                  |
| $T_C = 25\text{ }^{\circ}\text{C}$            |             | 800           |                    |
| Chip temperature                              | $T_j$       | + 150         | $^{\circ}\text{C}$ |
| Storage temperature                           | $T_{stg}$   | -55 ... + 150 |                    |
| Thermal resistance, chip case                 | $R_{thJC}$  | $\leq 0.16$   | K/W                |
| Diode thermal resistance, chip case           | $R_{thJCD}$ | $\leq 0.3$    |                    |
| Insulation test voltage, $t = 1\text{min.}$   | $V_{is}$    | 2500          | Vac                |
| Creepage distance                             | -           | 20            | mm                 |
| Clearance                                     | -           | 11            |                    |
| DIN humidity category, DIN 40 040             | -           | F             | -                  |
| IEC climatic category, DIN IEC 68-1           | -           | 55 / 150 / 56 |                    |

### Electrical Characteristics, at $T_j = 25\text{ °C}$ , unless otherwise specified

| Parameter | Symbol | Values |      |      | Unit |
|-----------|--------|--------|------|------|------|
|           |        | min.   | typ. | max. |      |

#### Static Characteristics

|                                                                                                                                                                                |               |        |            |          |    |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------|------------|----------|----|
| Gate threshold voltage<br>$V_{GE} = V_{CE}, I_C = 4\text{ mA}$                                                                                                                 | $V_{GE(th)}$  | 4.5    | 5.5        | 6.5      | V  |
| Collector-emitter saturation voltage<br>$V_{GE} = 15\text{ V}, I_C = 100\text{ A}, T_j = 25\text{ °C}$<br>$V_{GE} = 15\text{ V}, I_C = 100\text{ A}, T_j = 125\text{ °C}$      | $V_{CE(sat)}$ | -<br>- | 2.5<br>3.1 | 3<br>3.7 |    |
| Zero gate voltage collector current<br>$V_{CE} = 1200\text{ V}, V_{GE} = 0\text{ V}, T_j = 25\text{ °C}$<br>$V_{CE} = 1200\text{ V}, V_{GE} = 0\text{ V}, T_j = 125\text{ °C}$ | $I_{CES}$     | -<br>- | 1.5<br>6   | 2<br>-   | mA |
| Gate-emitter leakage current<br>$V_{GE} = 20\text{ V}, V_{CE} = 0\text{ V}$                                                                                                    | $I_{GES}$     | -      | -          | 200      |    |

#### AC Characteristics

|                                                                                               |           |    |     |   |   |
|-----------------------------------------------------------------------------------------------|-----------|----|-----|---|---|
| Transconductance<br>$V_{CE} = 20\text{ V}, I_C = 100\text{ A}$                                | $g_{fs}$  | 54 | -   | - | S |
| Input capacitance<br>$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$            | $C_{iss}$ | -  | 6.5 | - |   |
| Output capacitance<br>$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$           | $C_{oss}$ | -  | 1   | - |   |
| Reverse transfer capacitance<br>$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$ | $C_{rss}$ | -  | 0.5 | - |   |

### Electrical Characteristics, at $T_j = 25\text{ °C}$ , unless otherwise specified

| Parameter | Symbol | Values |      |      | Unit |
|-----------|--------|--------|------|------|------|
|           |        | min.   | typ. | max. |      |

### Switching Characteristics, Inductive Load at $T_j = 125\text{ °C}$

|                                                                                                                                   |              |   |     |     |    |
|-----------------------------------------------------------------------------------------------------------------------------------|--------------|---|-----|-----|----|
| Turn-on delay time<br>$V_{CC} = 600\text{ V}$ , $V_{GE} = 15\text{ V}$ , $I_C = 100\text{ A}$<br>$R_{Gon} = 6.8\text{ }\Omega$    | $t_{d(on)}$  | - | 130 | 260 | ns |
| Rise time<br>$V_{CC} = 600\text{ V}$ , $V_{GE} = 15\text{ V}$ , $I_C = 100\text{ A}$<br>$R_{Gon} = 6.8\text{ }\Omega$             | $t_r$        | - | 80  | 160 |    |
| Turn-off delay time<br>$V_{CC} = 600\text{ V}$ , $V_{GE} = -15\text{ V}$ , $I_C = 100\text{ A}$<br>$R_{Goff} = 6.8\text{ }\Omega$ | $t_{d(off)}$ | - | 400 | 600 |    |
| Fall time<br>$V_{CC} = 600\text{ V}$ , $V_{GE} = -15\text{ V}$ , $I_C = 100\text{ A}$<br>$R_{Goff} = 6.8\text{ }\Omega$           | $t_f$        | - | 70  | 100 |    |


### Free-Wheel Diode

|                                                                                                                                                                                            |          |   |            |          |               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---|------------|----------|---------------|
| Diode forward voltage<br>$I_F = 100\text{ A}$ , $V_{GE} = 0\text{ V}$ , $T_j = 25\text{ °C}$<br>$I_F = 100\text{ A}$ , $V_{GE} = 0\text{ V}$ , $T_j = 125\text{ °C}$                       | $V_F$    | - | 2.3<br>1.8 | 2.8<br>- | V             |
| Reverse recovery time<br>$I_F = 100\text{ A}$ , $V_R = -600\text{ V}$ , $V_{GE} = 0\text{ V}$<br>$dI_F/dt = -1000\text{ A}/\mu\text{s}$ , $T_j = 25\text{ °C}$                             | $t_{rr}$ | - | 0.3        | -        |               |
| Reverse recovery charge<br>$I_F = 100\text{ A}$ , $V_R = -600\text{ V}$ , $V_{GE} = 0\text{ V}$<br>$dI_F/dt = -1000\text{ A}/\mu\text{s}$<br>$T_j = 25\text{ °C}$<br>$T_j = 125\text{ °C}$ | $Q_{rr}$ | - | 4<br>12    | -<br>-   | $\mu\text{C}$ |
|                                                                                                                                                                                            |          | - |            |          |               |

### Power dissipation

$$P_{\text{tot}} = f(T_C)$$


parameter:  $T_j \leq 150^\circ\text{C}$

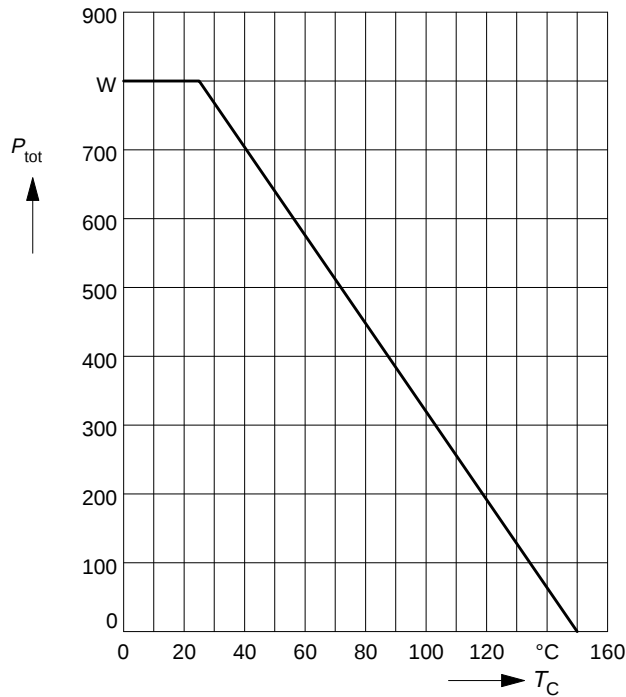

### Safe operating area

$$I_C = f(V_{CE})$$


parameter:  $D = 0$ ,  $T_C = 25^\circ\text{C}$ ,  $T_j \leq 150^\circ\text{C}$

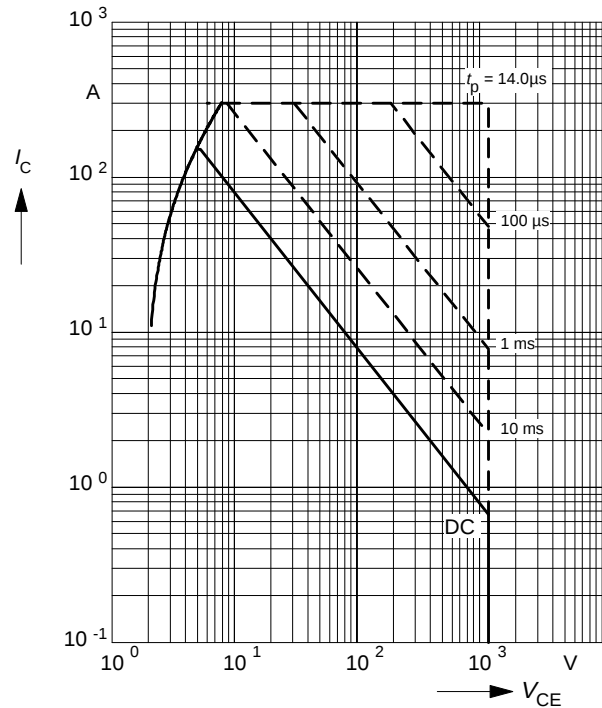

### Collector current

$$I_C = f(T_C)$$


parameter:  $V_{GE} \geq 15\text{ V}$ ,  $T_j \leq 150^\circ\text{C}$

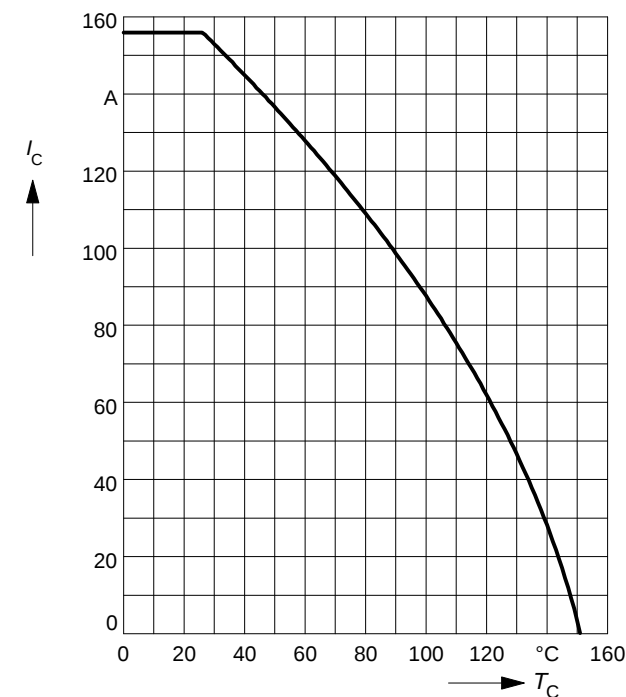

### Transient thermal impedance IGBT

$$Z_{\text{thJC}} = f(t_p)$$


parameter:  $D = t_p / T$

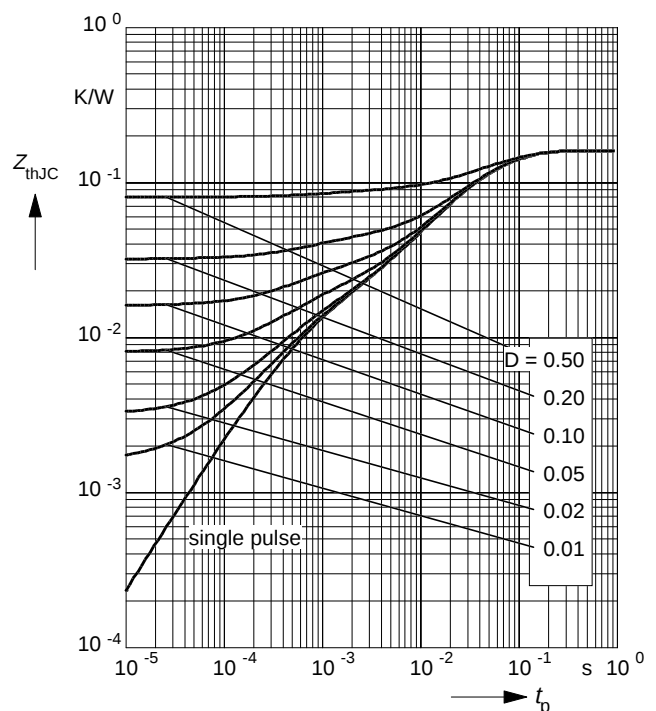

### Typ. output characteristics

$$I_C = f(V_{CE})$$


parameter:  $t_p = 80 \mu s$ ,  $T_j = 25^\circ C$

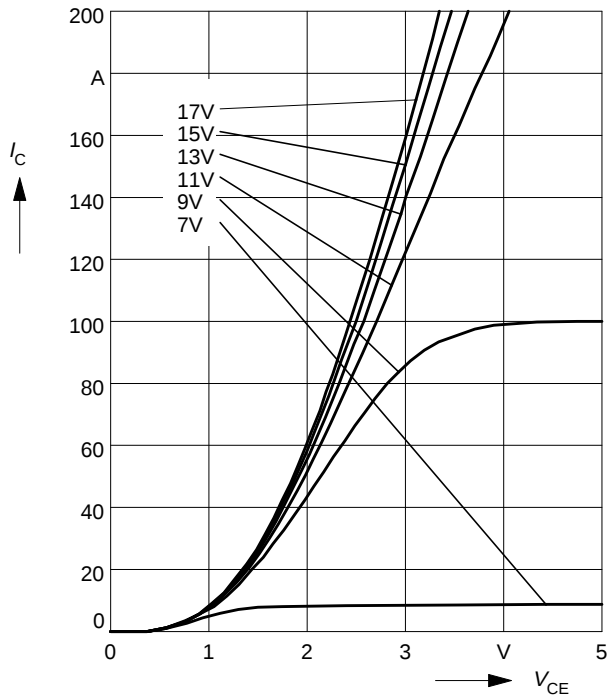

### Typ. output characteristics

$$I_C = f(V_{CE})$$


parameter:  $t_p = 80 \mu s$ ,  $T_j = 125^\circ C$

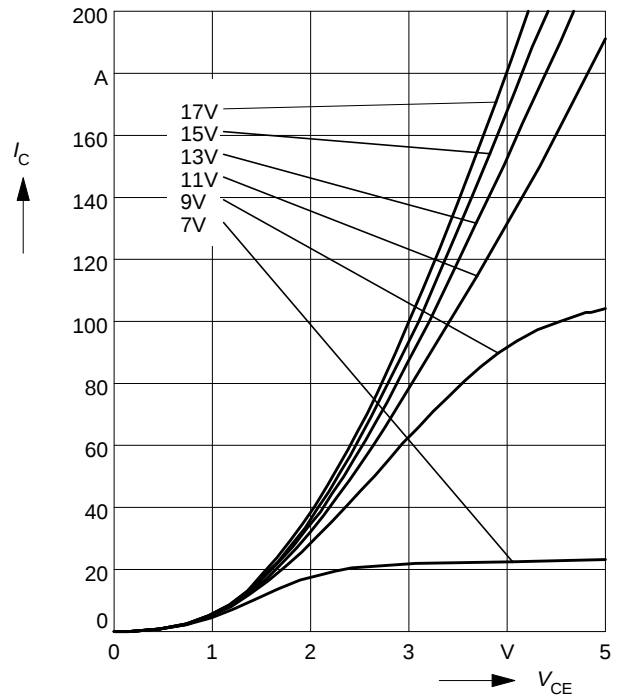

### Typ. transfer characteristics

$$I_C = f(V_{GE})$$


parameter:  $t_p = 80 \mu s$ ,  $V_{CE} = 20 V$

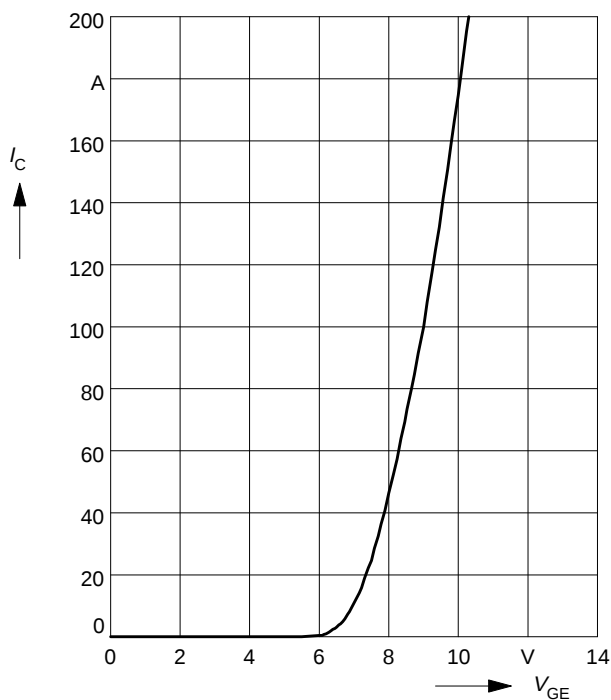

### Typ. gate charge

$$V_{GE} = f(Q_{Gate})$$


parameter:  $I_{C\ puls} = 100\ A$

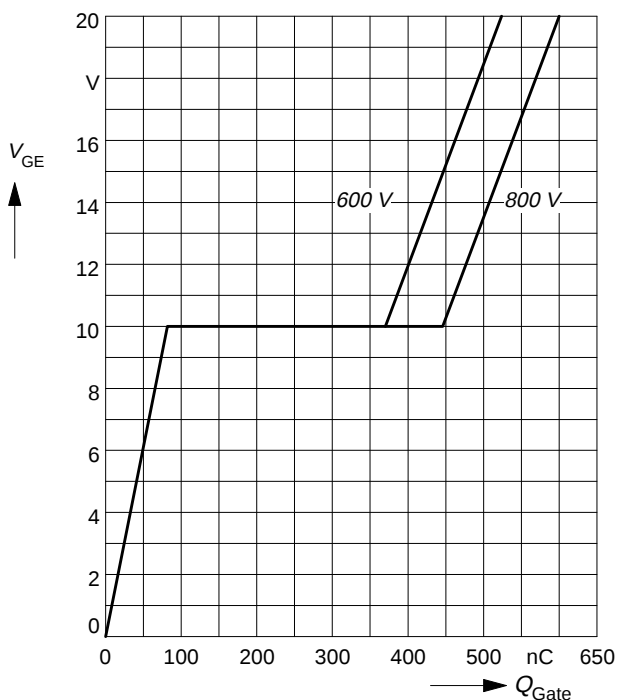

### Typ. capacitances

$$C = f(V_{CE})$$


parameter:  $V_{GE} = 0\ V$ ,  $f = 1\ MHz$

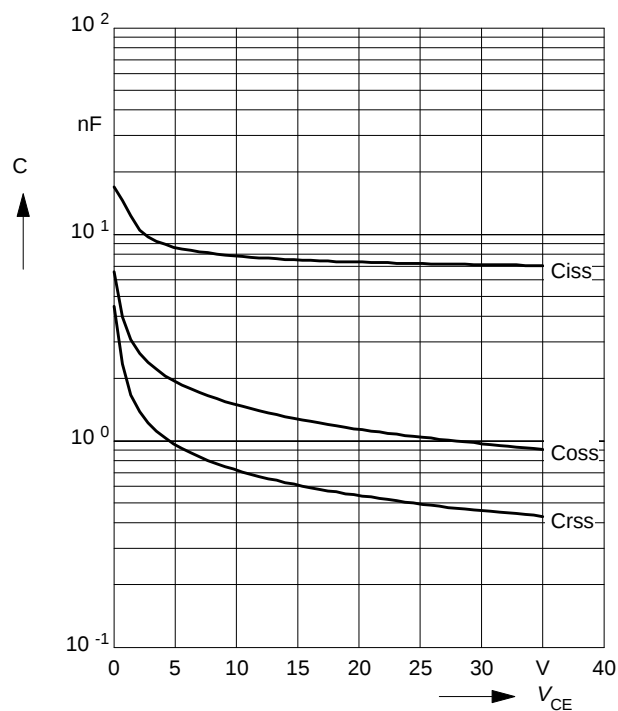

### Reverse biased safe operating area

$$I_{C\ puls} = f(V_{CE}), T_j = 150^\circ C$$


parameter:  $V_{GE} = 15\ V$

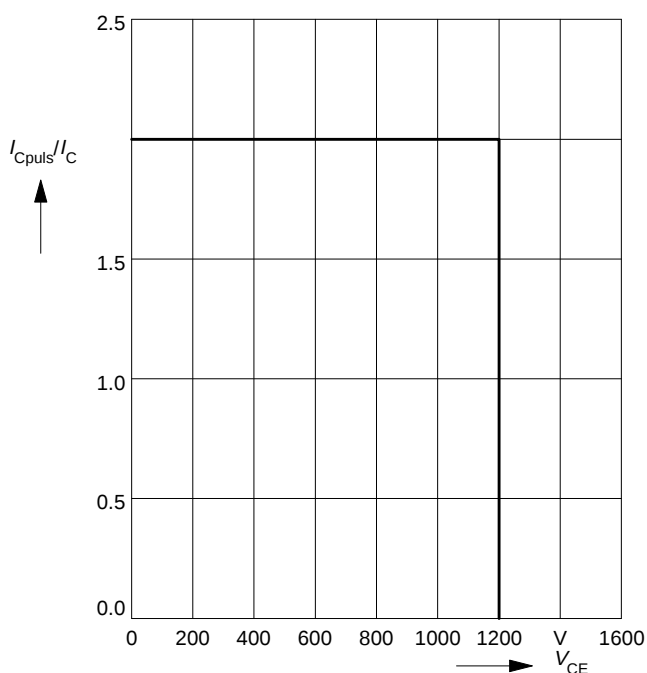

### Short circuit safe operating area

$$I_{C\ sc} = f(V_{CE}), T_j = 150^\circ C$$


parameter:  $V_{GE} = \pm 15\ V$ ,  $t_{SC} \leq 10\ \mu s$ ,  $L < 25\ nH$

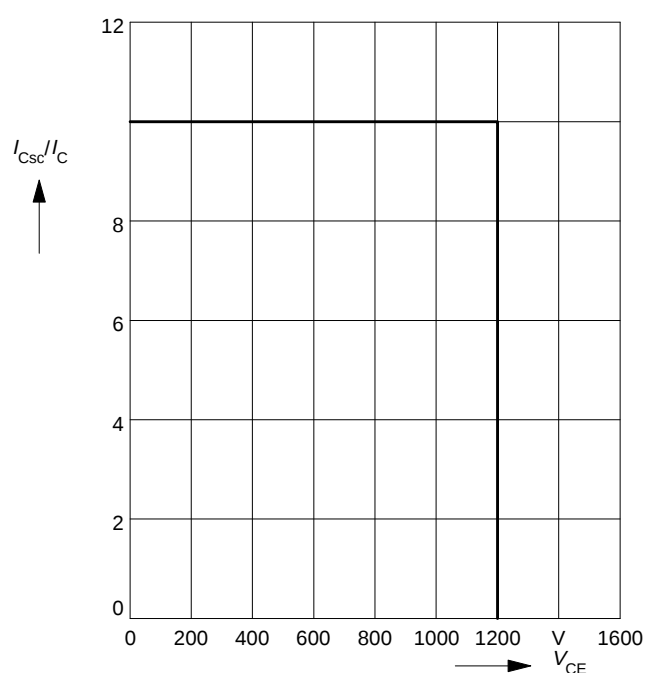

### Typ. switching time

$I = f(I_C)$ , inductive load,  $T_j = 125^\circ\text{C}$


par.:  $V_{CE} = 600\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $R_G = 6.8\ \Omega$

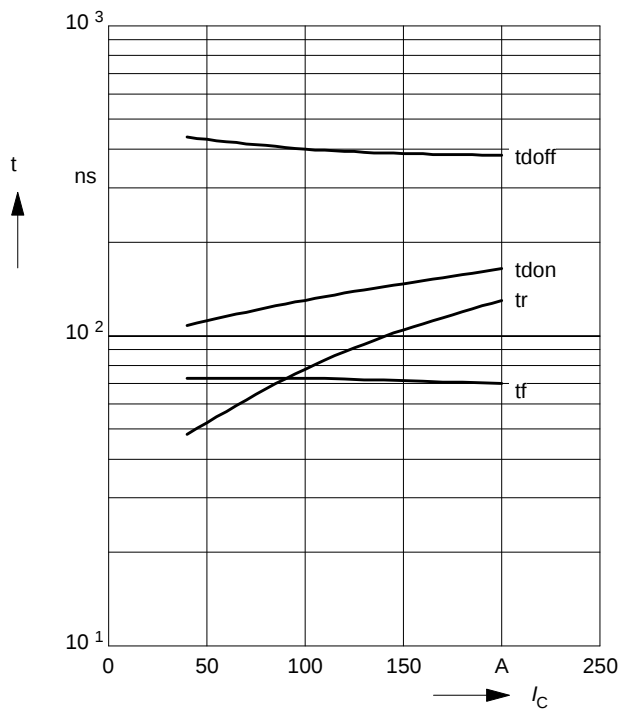

### Typ. switching time

$t = f(R_G)$ , inductive load,  $T_j = 125^\circ\text{C}$


par.:  $V_{CE} = 600\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $I_C = 100\text{ A}$

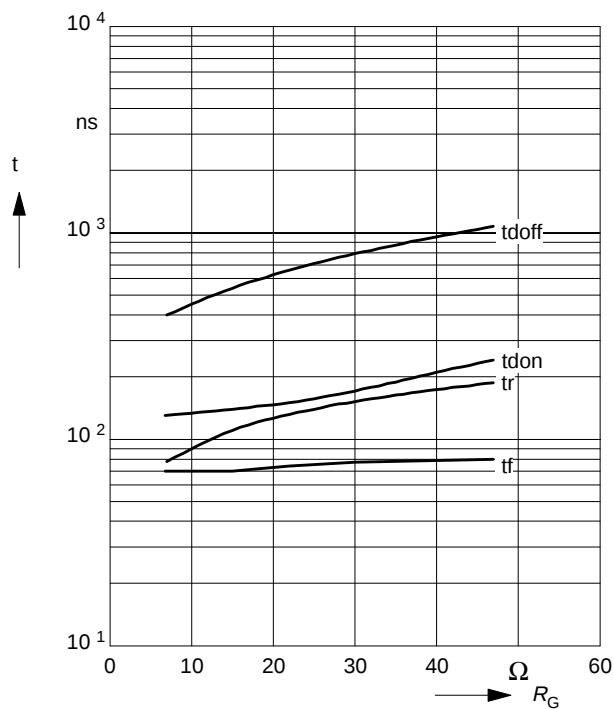

### Typ. switching losses

$E = f(I_C)$ , inductive load,  $T_j = 125^\circ\text{C}$


par.:  $V_{CE} = 600\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $R_G = 6.8\ \Omega$

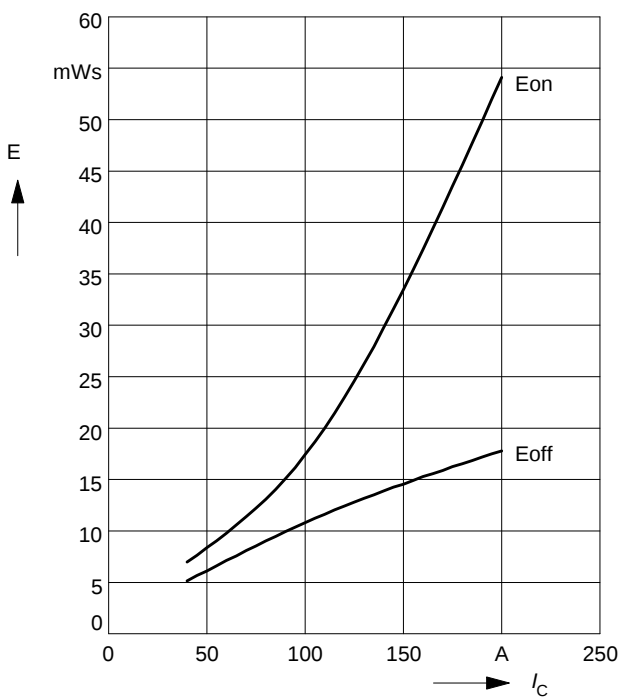

### Typ. switching losses

$E = f(R_G)$ , inductive load,  $T_j = 125^\circ\text{C}$


par.:  $V_{CE} = 600\text{ V}$ ,  $V_{GE} = \pm 15\text{ V}$ ,  $I_C = 100\text{ A}$

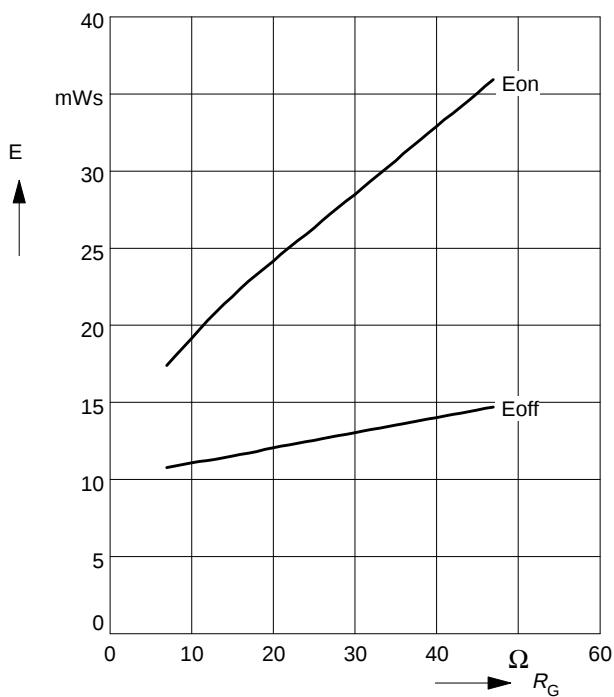

### Forward characteristics of fast recovery reverse diode

$$I_F = f(V_F)$$


parameter:  $T_j$

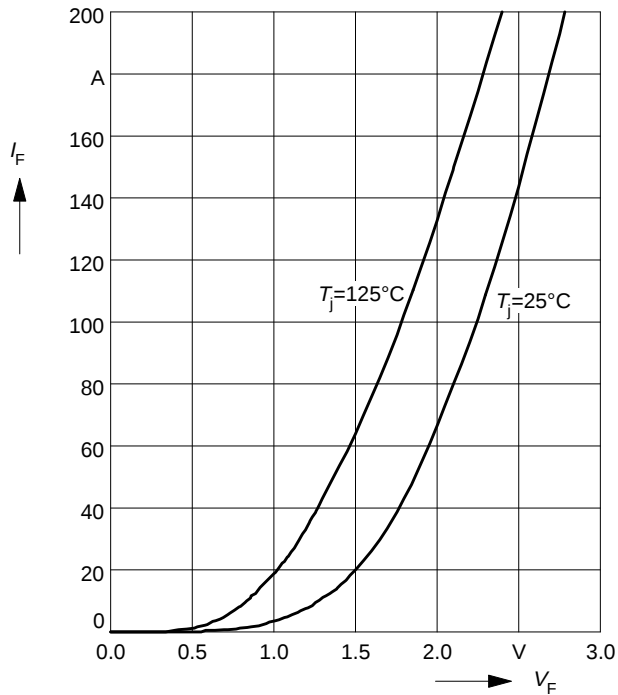


### Transient thermal impedance Diode

$$Z_{thJC} = f(t_p)$$

parameter:  $D = t_p / T$

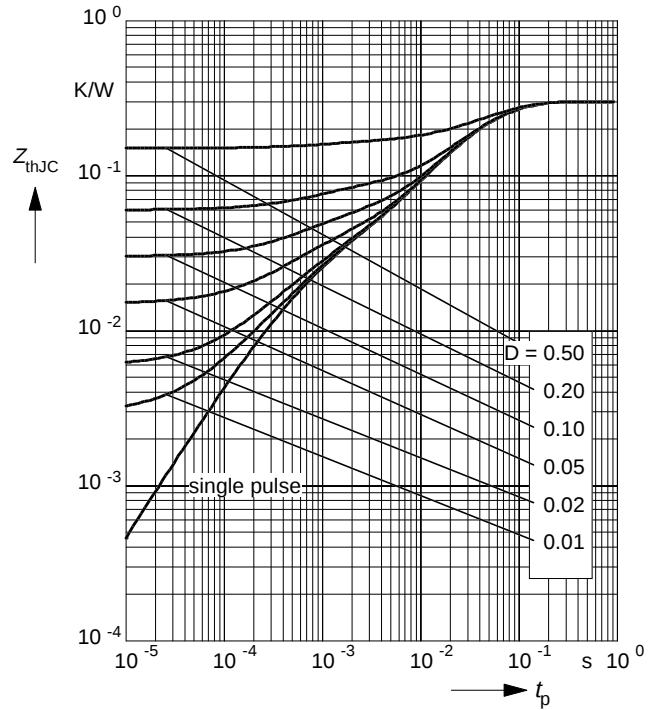


Circuit Diagram

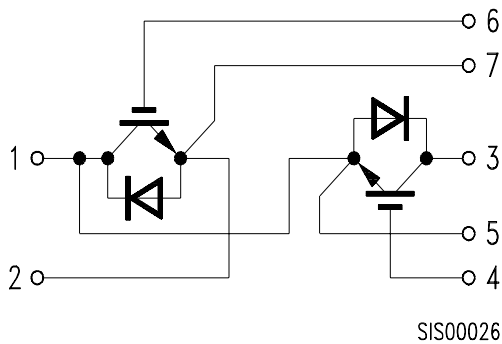

Package Outlines

Dimensions in mm

Weight: 420 g

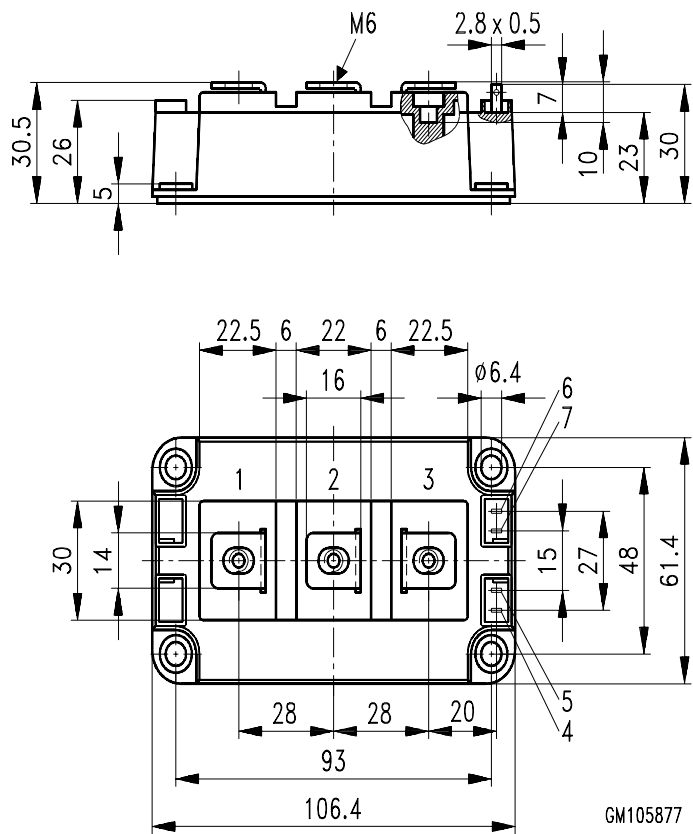



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.