

Document Title

256Kx16 bit Super Low Power and Low Voltage Full CMOS Static RAM

Revision History

| <u>Revision No.</u> | <u>History</u> | <u>Draft Date</u> | <u>Remark</u> |
|----------------------------|-----------------------|--------------------------|----------------------|
| 0.0 | Initial Draft | June 11, 2003 | Preliminary |

The attached datasheets are provided by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications and products. SAMSUNG Electronics will answer to your questions about device. If you have any questions, please contact the SAMSUNG branch offices.

K6F4016U6G Family

256K x 16 bit Super Low Power and Low Voltage Full CMOS Static RAM

FEATURES

- Process Technology: Full CMOS
- Organization: 256K x16 bit
- Power Supply Voltage: 2.7~3.3V
- Low Data Retention Voltage: 1.5V(Min)
- Three State Outputs
- Package Type: 48-TBGA-6.00x7.00

GENERAL DESCRIPTION


The K6F4016U6G families are fabricated by SAMSUNG's advanced full CMOS process technology. The families support industrial temperature range and 48 ball Chip Scale Package for user flexibility of system design. The family also supports low data retention voltage for battery back-up operation with low data retention current.

PRODUCT FAMILY

| Product Family | Operating Temperature | Vcc Range | Speed | Power Dissipation | | PKG Type |
|----------------|-----------------------|-----------|------------------------|-----------------------------------|------------------------------------|-------------------|
| | | | | Standby (I _{SB1} , Typ.) | Operating (I _{CC1} , Max) | |
| K6F4016U6G-F | Industrial(-40~85°C) | 2.7~3.3V | 55 ¹⁾ /70ns | 3μA ²⁾ | 4mA | 48-TBGA-6.00x7.00 |

1. The parameter is measured with 30pF test load.
2. Typical value is measured at Vcc=3.0V, T_A=25°C and not 100% tested.


PIN DESCRIPTION

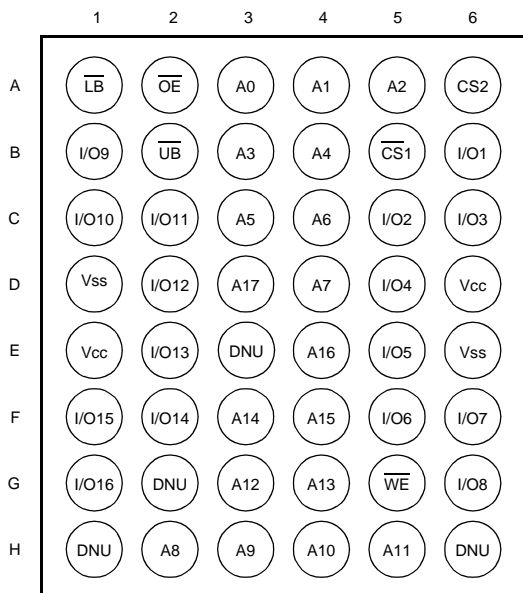

48-TBGA: Top View (Ball Down)

| Name | Function | Name | Function |
|------------------------|---------------------|-----------------|----------------------------------|
| $\overline{CS1}$, CS2 | Chip Select Inputs | Vcc | Power |
| \overline{OE} | Output Enable Input | Vss | Ground |
| \overline{WE} | Write Enable Input | \overline{UB} | Upper Byte(I/O _{9~16}) |
| A _{0~A17} | Address Inputs | \overline{LB} | Lower Byte(I/O _{1~8}) |
| I/O _{1~I/O16} | Data Inputs/Outputs | DNU | Do Not Use |

FUNCTIONAL BLOCK DIAGRAM

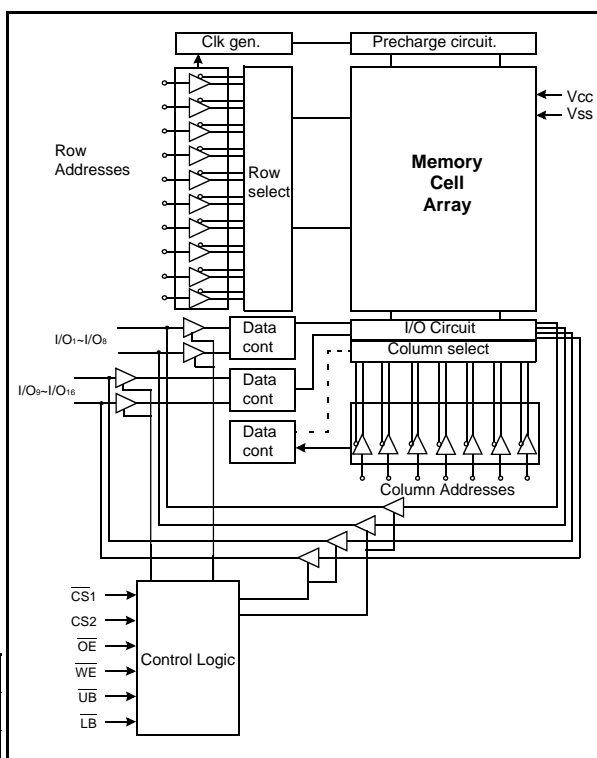

SAMSUNG ELECTRONICS CO., LTD. reserves the right to change products and specifications without notice.

PRODUCT LIST

| Industrial Temperature Products(-40~85°C) | |
|---|--|
| Part Name | Function |
| K6F4016U6G-EF55 K6F4016U6G-EF70 | 48-TBGA, 55ns, 3.0V 48-TBGA, 70ns, 3.0V |

FUNCTIONAL DESCRIPTION

| \overline{CS}_1 | CS_2 | \overline{OE} | \overline{WE} | \overline{LB} | \overline{UB} | I/O ₁₋₈ | I/O ₉₋₁₆ | Mode | Power |
|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------------|---------------------|------------------|---------|
| H | X ¹⁾ | X ¹⁾ | X ¹⁾ | X ¹⁾ | X ¹⁾ | High-Z | High-Z | Deselected | Standby |
| X ¹⁾ | L | X ¹⁾ | X ¹⁾ | X ¹⁾ | X ¹⁾ | High-Z | High-Z | Deselected | Standby |
| X ¹⁾ | X ¹⁾ | X ¹⁾ | X ¹⁾ | H | H | High-Z | High-Z | Deselected | Standby |
| L | H | H | H | L | X ¹⁾ | High-Z | High-Z | Output Disabled | Active |
| L | H | H | H | X ¹⁾ | L | High-Z | High-Z | Output Disabled | Active |
| L | H | L | H | L | H | Dout | High-Z | Lower Byte Read | Active |
| L | H | L | H | H | L | High-Z | Dout | Upper Byte Read | Active |
| L | H | L | H | L | L | Dout | Dout | Word Read | Active |
| L | H | X ¹⁾ | L | L | H | Din | High-Z | Lower Byte Write | Active |
| L | H | X ¹⁾ | L | H | L | High-Z | Din | Upper Byte Write | Active |
| L | H | X ¹⁾ | L | L | L | Din | Din | Word Write | Active |

1. X means don't care. (Must be low or high state)

ABSOLUTE MAXIMUM RATINGS¹⁾

| Item | Symbol | Ratings | Unit |
|---|------------------------------------|--|------|
| Voltage on any pin relative to V _{ss} | V _{IN} , V _{OUT} | -0.3 to V _{CC} +0.3V(Max. 3.6V) | V |
| Voltage on V _{CC} supply relative to V _{ss} | V _{CC} | -0.3 to 3.6 | V |
| Power Dissipation | P _D | 1.0 | W |
| Storage temperature | T _{STG} | -65 to 150 | °C |
| Operating Temperature | T _A | -40 to 85 | °C |

1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Functional operation should be restricted within recommended operating condition. Exposure to absolute maximum rating conditions for extended period may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS¹⁾

| Item | Symbol | Min | Typ | Max | Unit |
|--------------------|-----------------|--------------------|-----|------------------------------------|------|
| Supply voltage | V _{CC} | 2.7 | 3.0 | 3.3 | V |
| Ground | V _{SS} | 0 | 0 | 0 | V |
| Input high voltage | V _{IH} | 2.2 | - | V _{CC} +0.3 ²⁾ | V |
| Input low voltage | V _{IL} | -0.3 ³⁾ | - | 0.6 | V |

Note:

1. Industrial Product: T_A=-40 to 85°C, otherwise specified.
2. Overshoot: V_{CC}+2.0V in case of pulse width ≤20ns.
3. Undershoot: -2.0V in case of pulse width ≤20ns.
4. Overshoot and undershoot are sampled, not 100% tested.

CAPACITANCE¹⁾ (f=1MHz, T_A=25°C)

| Item | Symbol | Test Condition | Min | Max | Unit |
|--------------------------|-----------------|---------------------|-----|-----|------|
| Input capacitance | C _{IN} | V _{IN} =0V | - | 8 | pF |
| Input/Output capacitance | C _{IO} | V _{IO} =0V | - | 10 | pF |

1. Capacitance is sampled, not 100% tested

DC AND OPERATING CHARACTERISTICS


| Item | Symbol | Test Conditions | Min | Typ ¹⁾ | Max | Unit |
|---------------------------|------------------|--|--------------|-------------------|----------|------|
| Input leakage current | I _{LI} | V _{IN} =V _{SS} to V _{CC} | -1 | - | 1 | μA |
| Output leakage current | I _{LO} | $\overline{CS}_1=V_{IH}$ or $\overline{CS}_2=V_{IL}$ or $\overline{OE}=V_{IH}$ or $\overline{WE}=V_{IL}$ or $\overline{LB}=\overline{UB}=V_{IH}$, V _{IO} =V _{SS} to V _{CC} | -1 | - | 1 | μA |
| Average operating current | I _{CC1} | Cycle time=1μs, 100% duty, I _{IO} =0mA, $\overline{CS}_1 \leq 0.2V$, $\overline{LB} \leq 0.2V$ or/and $\overline{UB} \leq 0.2V$, $\overline{CS}_2 \geq V_{CC}-0.2V$, V _{IN} ≤0.2V or V _{IN} ≥V _{CC} -0.2V | - | - | 4 | mA |
| | I _{CC2} | Cycle time=Min, I _{IO} =0mA, 100% duty, $\overline{CS}_1=V_{IL}$, $\overline{CS}_2=V_{IH}$, $\overline{LB}=V_{IL}$ or/and $\overline{UB}=V_{IL}$, V _{IN} =V _{IL} or V _{IH} | 70ns 55ns | - - | 22 27 | mA |
| Output low voltage | V _{OL} | I _{OL} = 2.1mA | - | - | 0.4 | V |
| Output high voltage | V _{OH} | I _{OH} = -1.0mA | 2.4 | - | - | V |
| Standby Current (CMOS) | I _{SB1} | Other input =0-V _{CC} 1) $\overline{CS}_1 \geq V_{CC}-0.2V$, $\overline{CS}_2 \geq V_{CC}-0.2V$ (\overline{CS}_1 controlled) or 2) $0V \leq \overline{CS}_2 \leq 0.2V$ (\overline{CS}_2 controlled) | - | 3 | 10 | μA |

1. Typical values are measured at V_{CC}=3.0V, T_A=25°C and not 100% tested.

AC OPERATING CONDITIONS

TEST CONDITIONS (Test Load and Test Input/Output Reference)

Input pulse level: 0.4 to 2.2V
 Input rising and falling time: 5ns
 Input and output reference voltage: 1.5V
 Output load (See right): $C_L = 100\text{pF} + 1\text{TTL}$
 $C_L = 30\text{pF} + 1\text{TTL}$



1. Including scope and jig capacitance
2. $R_1 = 3070\Omega$, $R_2 = 3150\Omega$
3. $V_{TM} = 2.8\text{V}$

AC CHARACTERISTICS ($V_{CC} = 2.7 \sim 3.3\text{V}$, Industrial product: $T_A = -40$ to 85°C)

| Parameter List | | Symbol | Speed | | | | Units |
|---------------------------------|---|------------------|-------|-----|------|-----|-------|
| | | | 55ns | | 70ns | | |
| | | | Min | Max | Min | Max | |
| Read | Read cycle time | t _{RC} | 55 | - | 70 | - | ns |
| | Address access time | t _{AA} | - | 55 | - | 70 | ns |
| | Chip select to output | t _{CO} | - | 55 | - | 70 | ns |
| | Output enable to valid output | t _{OE} | - | 25 | - | 35 | ns |
| | $\overline{\text{UB}}, \overline{\text{LB}}$ Access Time | t _{BA} | - | 55 | - | 70 | ns |
| | Chip select to low-Z output | t _{LZ} | 10 | - | 10 | - | ns |
| | $\overline{\text{UB}}, \overline{\text{LB}}$ enable to low-Z output | t _{BLZ} | 10 | - | 10 | - | ns |
| | Output enable to low-Z output | t _{OLZ} | 5 | - | 5 | - | ns |
| | Chip disable to high-Z output | t _{HZ} | 0 | 20 | 0 | 25 | ns |
| | $\overline{\text{UB}}, \overline{\text{LB}}$ disable to high-Z output | t _{BHZ} | 0 | 20 | 0 | 25 | ns |
| | Output disable to high-Z output | t _{OHZ} | 0 | 20 | 0 | 25 | ns |
| Output hold from address change | t _{OH} | 10 | - | 10 | - | ns | |
| Write | Write cycle time | t _{WC} | 55 | - | 70 | - | ns |
| | Chip select to end of write | t _{CW} | 45 | - | 60 | - | ns |
| | Address set-up time | t _{AS} | 0 | - | 0 | - | ns |
| | Address valid to end of write | t _{AW} | 45 | - | 60 | - | ns |
| | $\overline{\text{UB}}, \overline{\text{LB}}$ Valid to End of Write | t _{BW} | 45 | - | 60 | - | ns |
| | Write pulse width | t _{WP} | 40 | - | 50 | - | ns |
| | Write recovery time | t _{WR} | 0 | - | 0 | - | ns |
| | Write to output high-Z | t _{WHZ} | 0 | 20 | 0 | 20 | ns |
| | Data to write time overlap | t _{DW} | 25 | - | 30 | - | ns |
| | Data hold from write time | t _{DH} | 0 | - | 0 | - | ns |
| | End write to output low-Z | t _{OW} | 5 | - | 5 | - | ns |


DATA RETENTION CHARACTERISTICS

| Item | Symbol | Test Condition | Min | Typ | Max | Unit |
|------------------------------------|------------------|---|-----------------|-----|-----|---------------|
| V _{CC} for data retention | VDR | $\overline{\text{CS}}_1 \geq V_{CC} - 0.2\text{V}^1$, $V_{IN} \geq 0\text{V}$ | 1.5 | - | 3.3 | V |
| Data retention current | IDR | $V_{CC} = 1.5\text{V}$, $\overline{\text{CS}}_1 \geq V_{CC} - 0.2\text{V}^1$, $V_{IN} \geq 0\text{V}$ | - | - | 3 | μA |
| Data retention set-up time | t _{SDR} | See data retention waveform | 0 | - | - | ns |
| Recovery time | t _{RDR} | | t _{RC} | - | - | |


1. $\overline{\text{CS}}_1 \geq V_{CC} - 0.2\text{V}$, $\overline{\text{CS}}_2 \geq V_{CC} - 0.2\text{V}$ ($\overline{\text{CS}}_1$ controlled) or
2. $0 \leq \overline{\text{CS}}_2 \leq 0.2\text{V}$ ($\overline{\text{CS}}_2$ controlled)

TIMING DIAGRAMS

TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled, $\overline{CS1}=\overline{OE}=V_{IL}$, $CS2=\overline{WE}=V_{IH}$, \overline{UB} or/and $\overline{LB}=V_{IL}$)

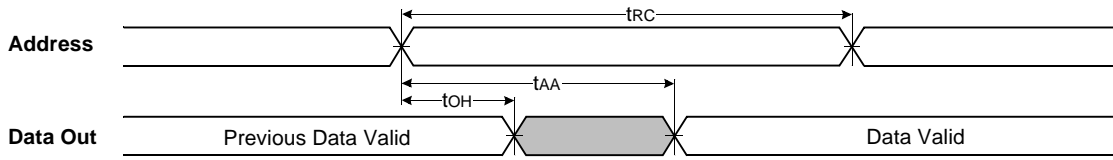


TIMING WAVEFORM OF READ CYCLE(2) ($\overline{WE}=V_{IH}$)

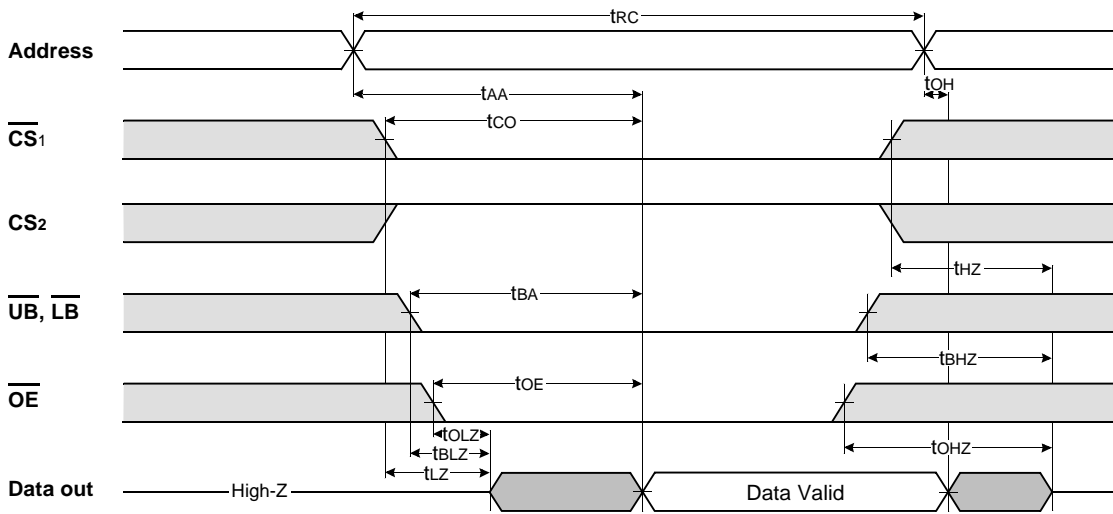


NOTES (READ CYCLE)

1. t_{HZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels.
2. At any given temperature and voltage condition, $t_{HZ}(\text{Max.})$ is less than $t_{LZ}(\text{Min.})$ both for a given device and from device to device interconnection.

TIMING WAVEFORM OF WRITE CYCLE(1) (\overline{WE} Controlled)

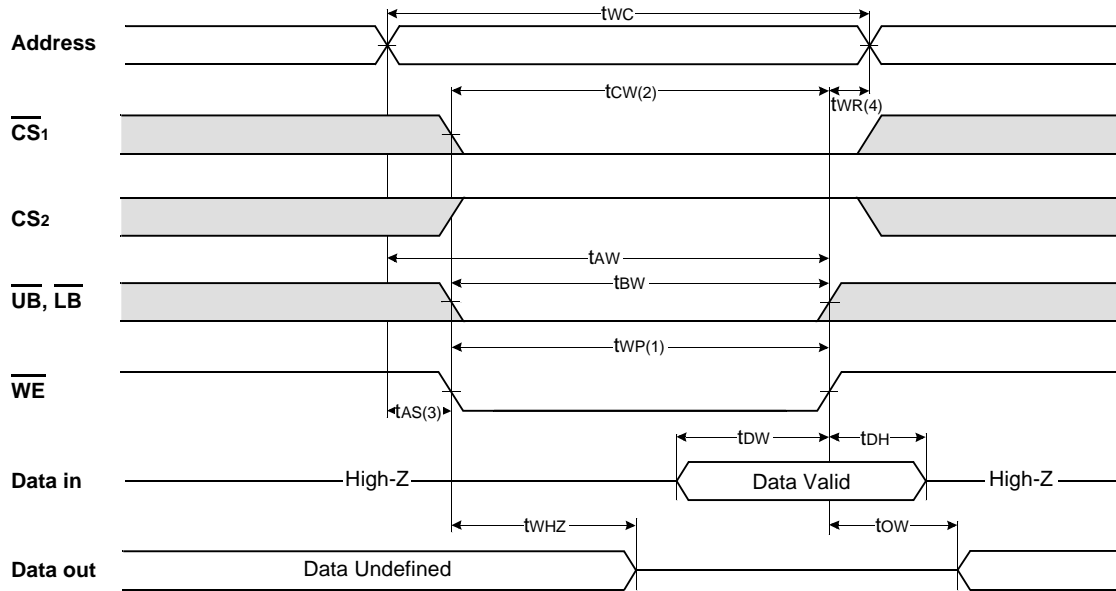


TIMING WAVEFORM OF WRITE CYCLE(2) ($\overline{CS1}$ Controlled)

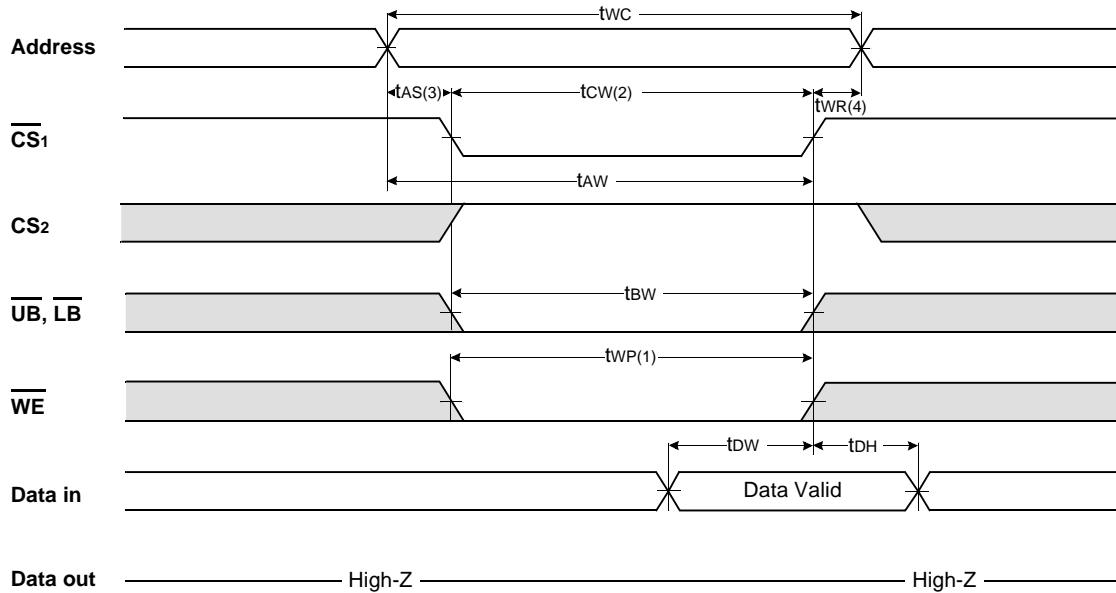

K6F4016U6G Family

TIMING WAVEFORM OF WRITE CYCLE(3) (\overline{UB} , \overline{LB} Controlled)

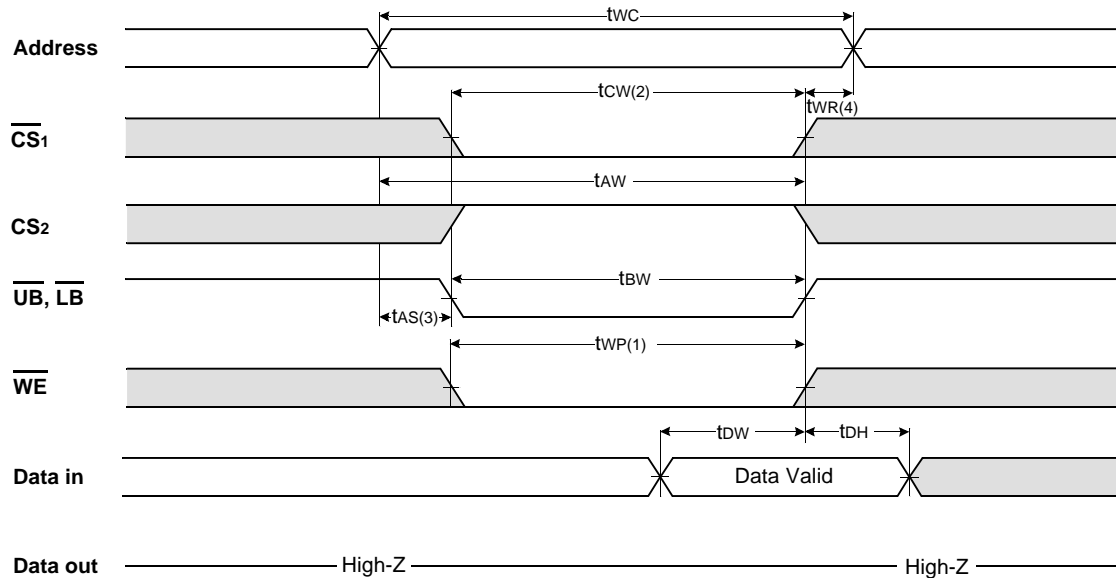


NOTES (WRITE CYCLE)


1. A write occurs during the overlap (t_{WP}) of low $\overline{CS1}$ and low \overline{WE} . A write begins when $\overline{CS1}$ goes low and \overline{WE} goes low with asserting \overline{UB} or \overline{LB} for single byte operation or simultaneously asserting \overline{UB} and \overline{LB} for double byte operation. A write ends at the earliest transition when $\overline{CS1}$ goes high and \overline{WE} goes high. The t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the $\overline{CS1}$ going low to the end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR} is applied in case a write ends with $\overline{CS1}$ or \overline{WE} going high.

DATA RETENTION WAVE FORM

$\overline{CS1}$ controlled

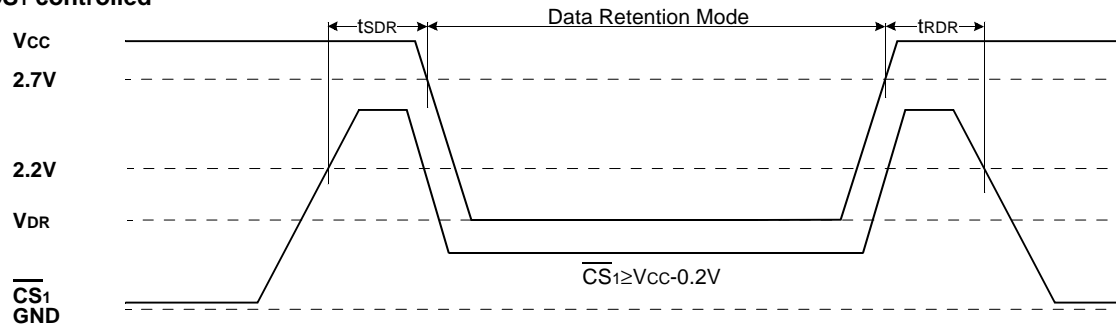




$CS2$ controlled

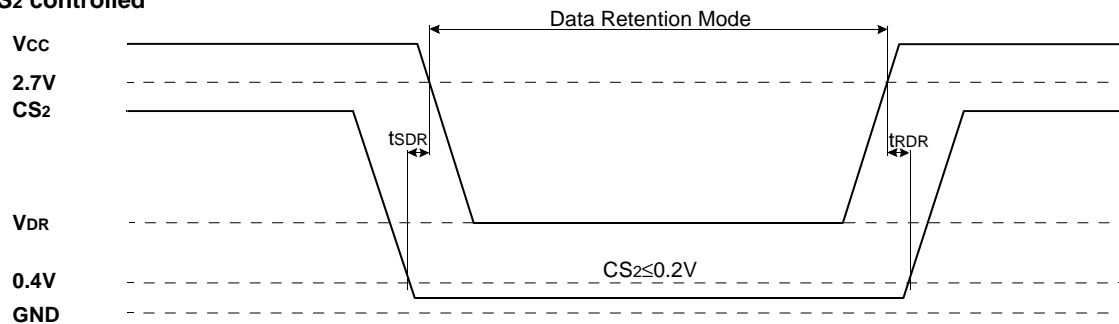

PACKAGE DIMENSION

Unit: millimeters

48 TAPE BALL GRID ARRAY(0.75mm ball pitch)

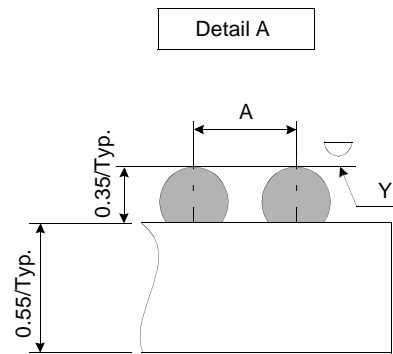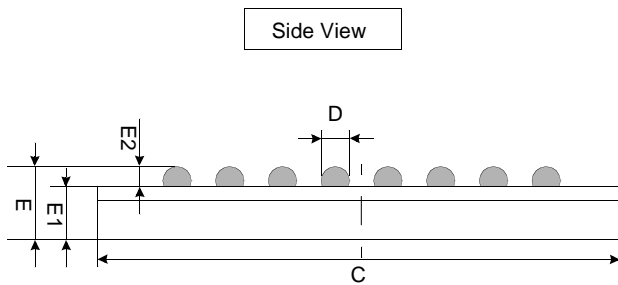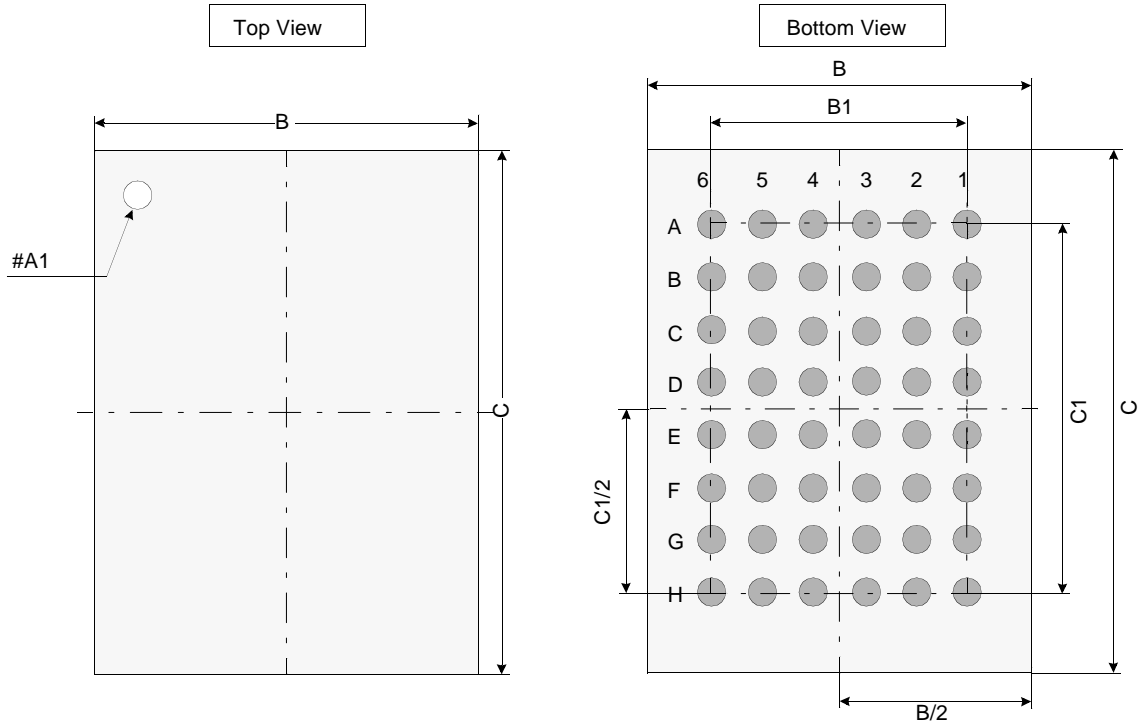

| | Min | Typ | Max |
|----|------|------|------|
| A | - | 0.75 | - |
| B | 5.90 | 6.00 | 6.10 |
| B1 | - | 3.75 | - |
| C | 6.90 | 7.00 | 7.10 |
| C1 | - | 5.25 | - |
| D | 0.40 | 0.45 | 0.50 |
| E | 0.80 | 0.90 | 1.00 |
| E1 | - | 0.55 | - |
| E2 | 0.30 | 0.35 | 0.40 |
| Y | - | - | 0.08 |

Notes.

1. Bump counts: 48(8 row x 6 column)
2. Bump pitch: (x,y)=(0.75 x 0.75)(typ.)
3. All tolerance are +/-0.050 unless otherwise specified.
4. Typ: Typical
5. Y is coplanarity: 0.08(Max)

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.