

Fuji Discrete Package IGBT


■ Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Minimized Internal Stray Inductance

■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

■ Outline Drawing

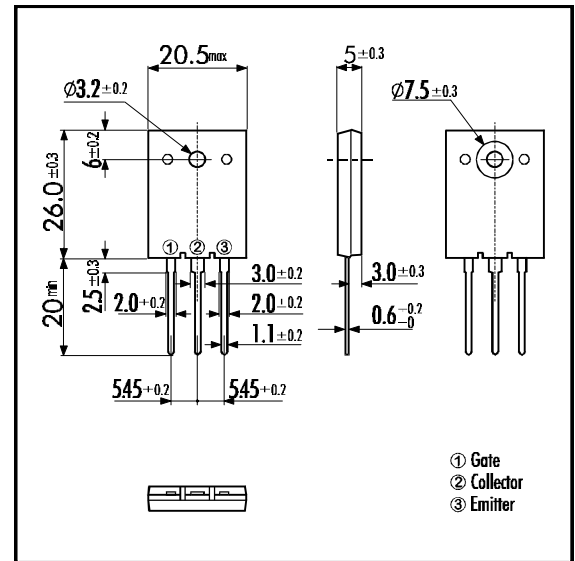


■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V _{CES}	600	V
Gate -Emitter Voltage	V _{GES}	± 20	V
Collector Current	DC T _c = 25°C	I _C 25	82
	DC T _c =100°C	I _C 100	50
	1ms T _c = 25°C	I _C PULSE	328
IGBT Max. Power Dissipation	P _C	310	W
Operating Temperature	T _j	+150	°C
Storage Temperature	T _{stg}	-40 ~ +150	°C
Mounting Screw Torque		70	Nm

■ Equivalent Circuit






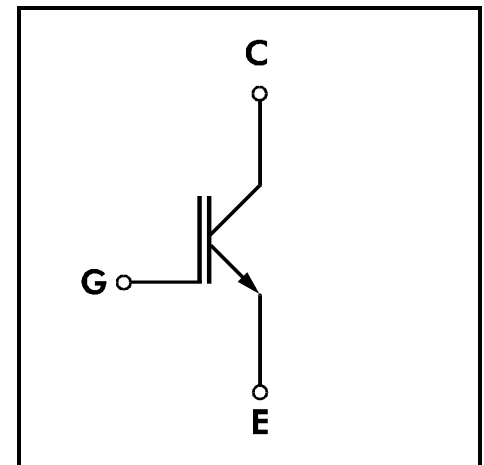








• Electrical Characteristics (at T_j=25°C)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CES}	V _{GE} =0V V _{CE} =600V			1.0	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			20	μA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =50mA	5.5		8.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =50A			3.0	V
Input capacitance	C _{ies}	V _{GE} =0V		3000		pF
Output capacitance	C _{oes}	V _{CE} =10V		650		pF
Reverse Transfer capacitance	C _{res}	f=1MHz		150		pF
Switching Time	Turn-on Time	t _{ON}			1.2	μs
		t _r			0.6	μs
	Turn-off Time	t _{OFF}			1.0	μs
		t _f			0.35	μs
	Turn-on Time	t _{ON}		0.16		μs
		t _r		0.11		μs
	Turn-off Time	t _{OFF}		0.30		μs
		t _f			0.35	μs


• Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}				0.40	°C/W

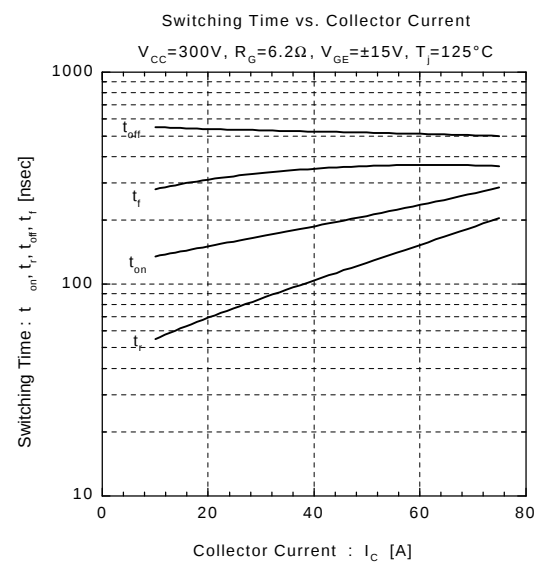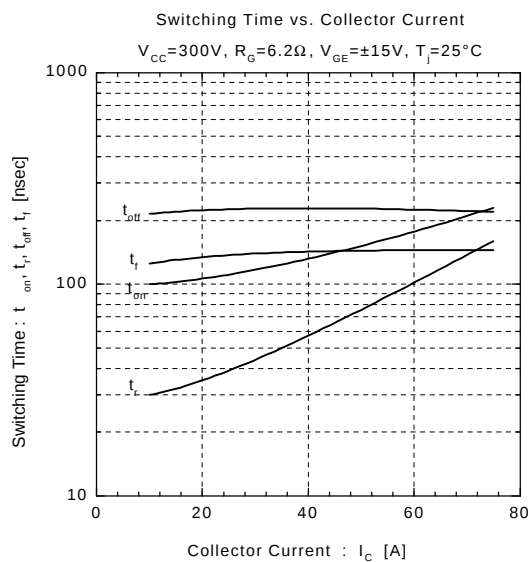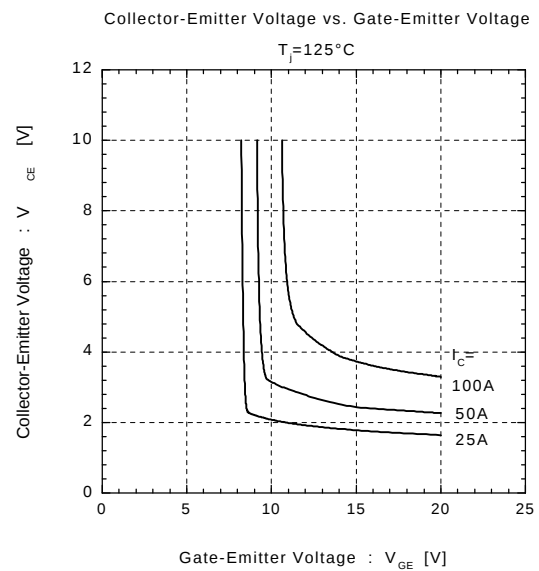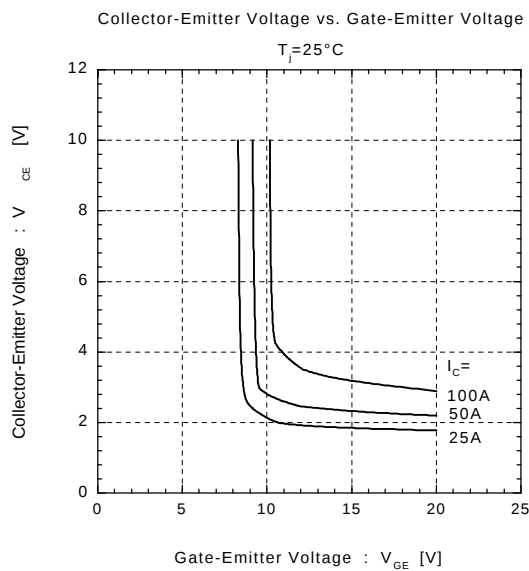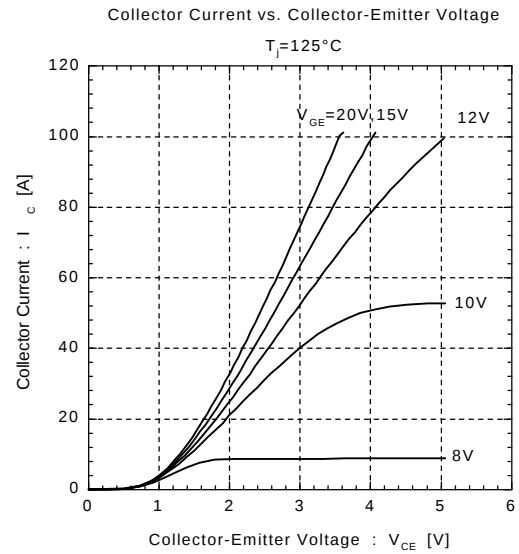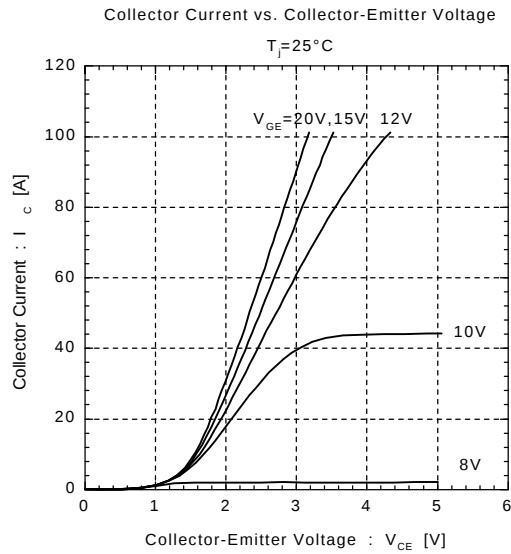


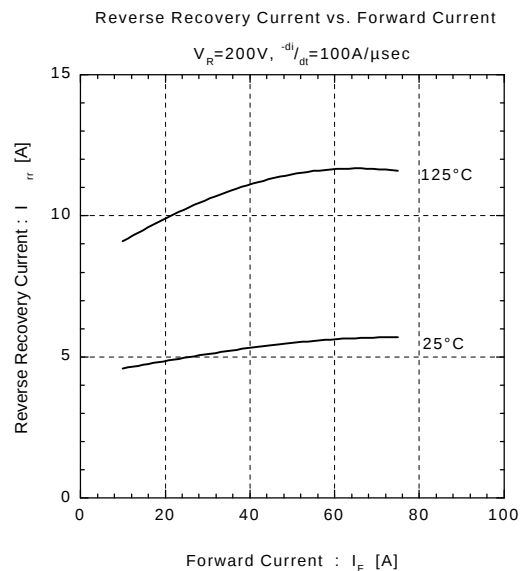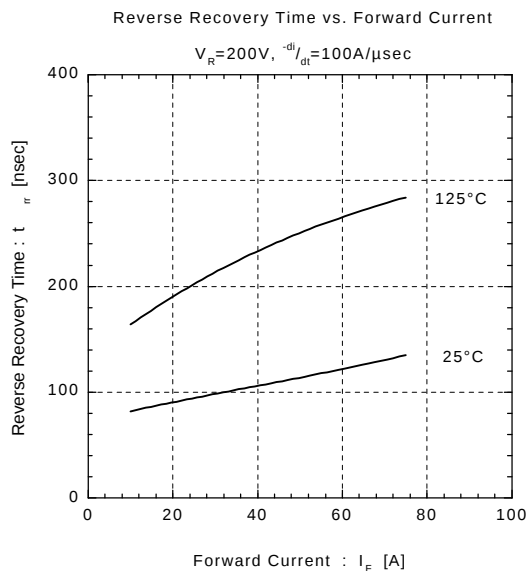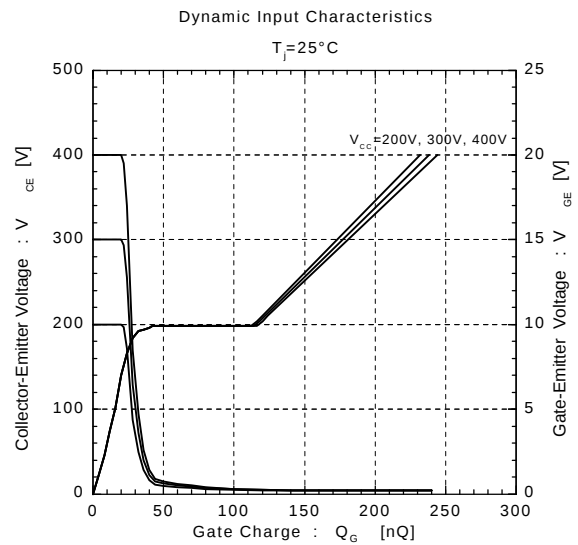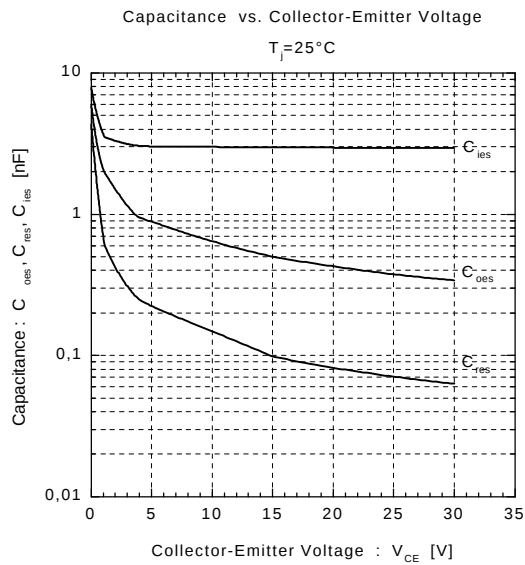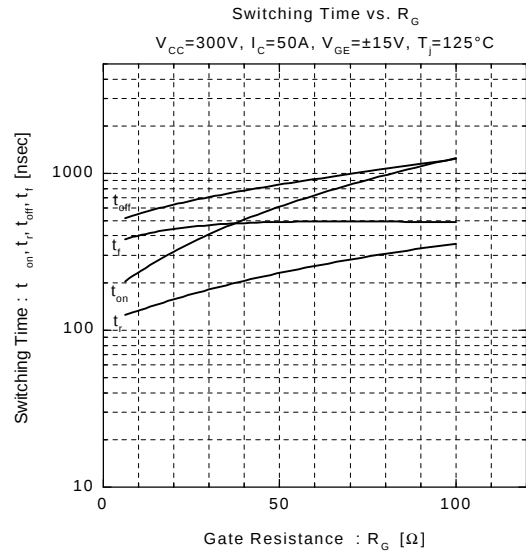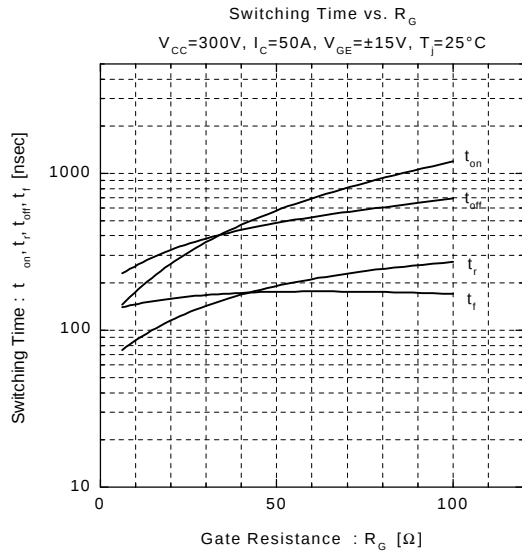



Reverse Biased Safe Operating Area

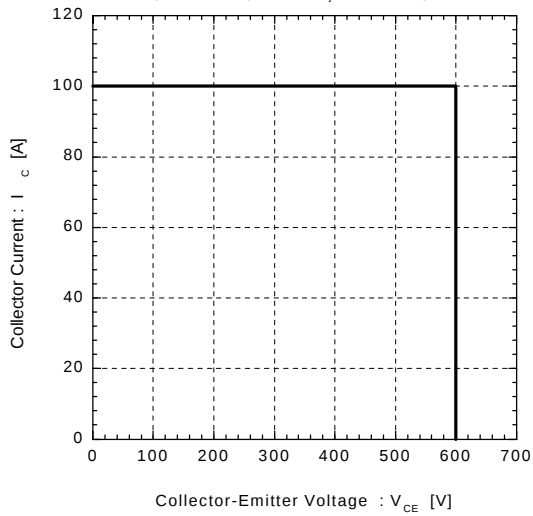 $+V_{GE}=15V, -V_{GE}\leq 15V, T_J\leq 125^\circ C, R_G\geq 6.2\Omega$


Typical Short Circuit Capability

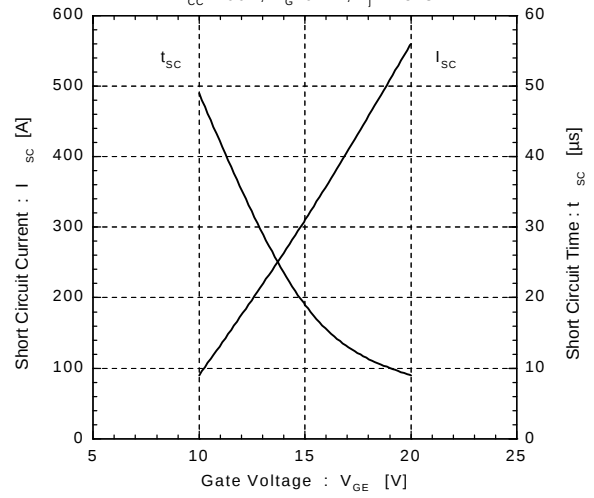 $V_{CC}=400V, R_G=6.2\Omega, T_J=125^\circ C$


Forward Voltage vs. Forward Current

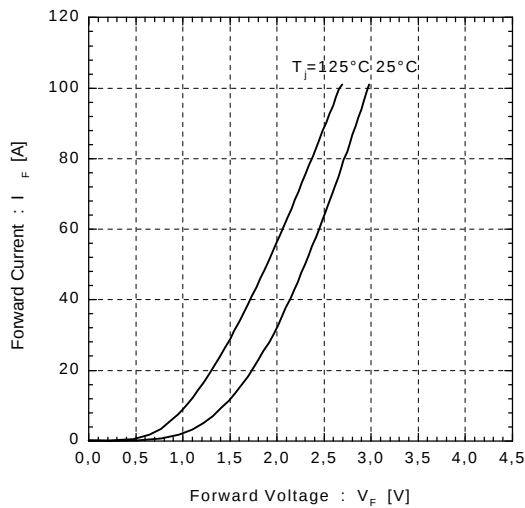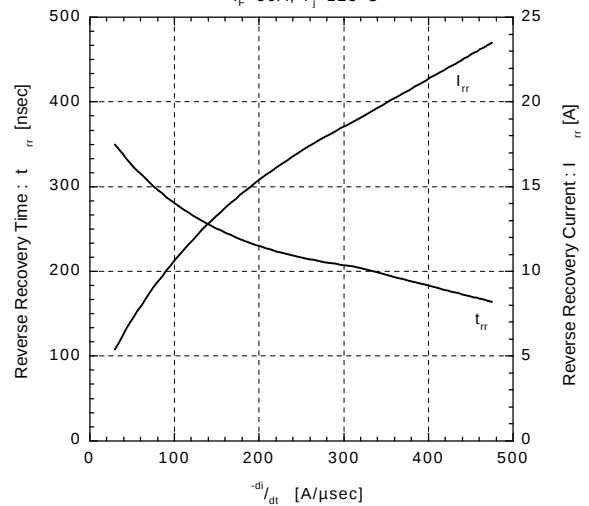
 Reverse Recovery Characteristics vs. $-di/dt$
 $I_F=50A, T_J=125^\circ C$


Transient Thermal Resistance

