


MECHANICAL DATA

Dimensions in mm (inches)

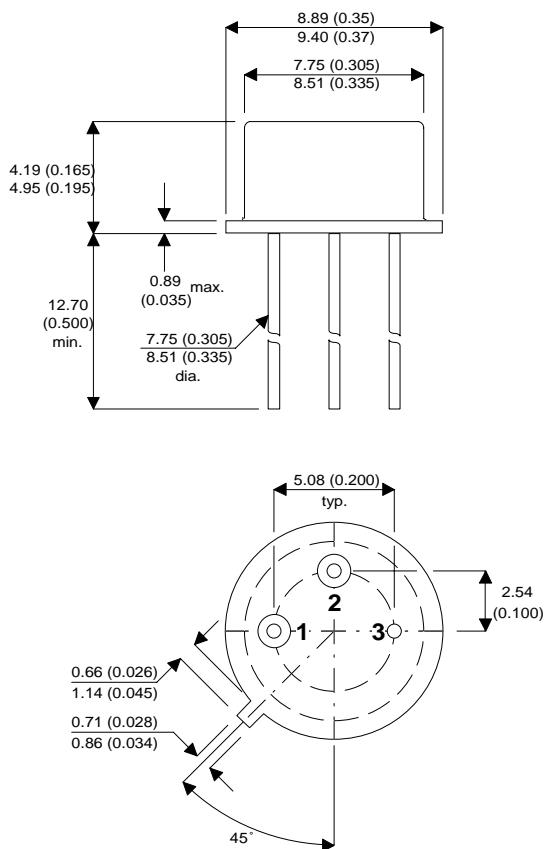

**SILICON EPITAXIAL
NPN TRANSISTOR**

FEATURES

General purpose power transistor for switching and linear applications in a hermetic TO-39 package.

TO-39 PACKAGE

PIN 1 – Emitter PIN 2 – Base PIN 3 – Collector

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	80V
$V_{CER(sus)}$	Collector – Emitter Sustaining Voltage $R_{BE} = 100\Omega$	80V
$V_{CEO(sus)}$	Collector – Emitter Sustaining Voltage	65V
V_{EBO}	Emitter – Base Voltage	5V
I_C	Continuous Collector Current	3.5A
I_B	Continuous Collector Current	1A
P_D	Total Device Dissipation $T_A = 25^\circ\text{C}$	10W
	Derate above 25°C	0.057W/ $^\circ\text{C}$
P_D	Total Device Dissipation $T_C = 25^\circ\text{C}$	1W
	Derate above 25°C	0.0057W/ $^\circ\text{C}$
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-65 to +200 $^\circ\text{C}$
T_L	Lead temperature, $\geq 1/32"$ (0.8mm) from seating plane for 10 s max.	230 $^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CER} Collector Cut-off Current	$V_{CE} = 65V$			10	μA
	$R_{BE} = 100\Omega$ $T_C = 150^\circ\text{C}$			1	mA
I_{CEX} Collector Cut-off Current	$V_{CE} = 75V$ $V_{BE} = -1.5V$			10	μA
	$R_{BE} = 100\Omega$ $T_C = 150^\circ\text{C}$			1	mA
I_{CEO} Collector Cut-off Current	$V_{CE} = 50V$ $I_B = 0$			100	μA
I_{EBO} Emitter Cut-off Current	$V_{BE} = -5V$ $I_C = 0$			10	μA
h_{FE}^* DC Current Gain	$V_{CE} = 2V$ $I_C = 1A$	20		100	—
	$V_{CE} = 2V$ $I_C = 3.2A$	4			
$V_{CEO(sus)}^*$ Collector – Emitter Sustaining Voltage ¹	$I_C = 100\text{mA}$ $I_B = 0$	65			V
$V_{CER(sus)}^*$ Collector – Emitter Sustaining Voltage ¹	$I_C = 100\text{mA}$ $R_{BE} = 100\Omega$	80			
V_{BE} Base – Emitter Voltage	$V_{CE} = 2V$ $I_C = 1A$			1.5	V
$V_{CE(sat)}$ Collector – Emitter Saturation Voltage ²	$I_C = 1A$ $I_B = 100\text{mA}$			0.5	
$ h_{fe} $ Small Signal Common – Emitter Current Gain	$V_{CE} = -2V$ $I_C = 100\text{mA}$ $f = 200\text{kHz}$	5		20	—
h_{fe} Small Signal Common – Emitter Current Gain	$V_{CE} = 2V$ $I_C = 100\text{mA}$ $f = 1\text{kHz}$	25			—
t_{ON} Turn-on Time	$V_{CE} = 30V$ $I_C = 1A$ $I_{B1} = I_{B2} = 100\text{mA}$			5	μs
t_{OFF} Turn-off Time				15	
$R_{\theta JC}$ Thermal Resistance Junction – Case				17.5	$^\circ\text{C/W}$
$R_{\theta JA}$ Thermal Resistance Junction – Ambient				17.5	

NOTES

* Pulse Test: $t_p = 300\mu\text{s}$, $\delta = 1.8\%$.

- 1) These tests *MUST NOT* be measured on a curve tracer.
- 2) Measured $\frac{1}{4}$ " (6.35 mm) from case. Lead resistance is critical in this test.
- 3) Measured at a frequency where $|h_{fe}|$ is decreasing at approximately 6dB per octave.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.