

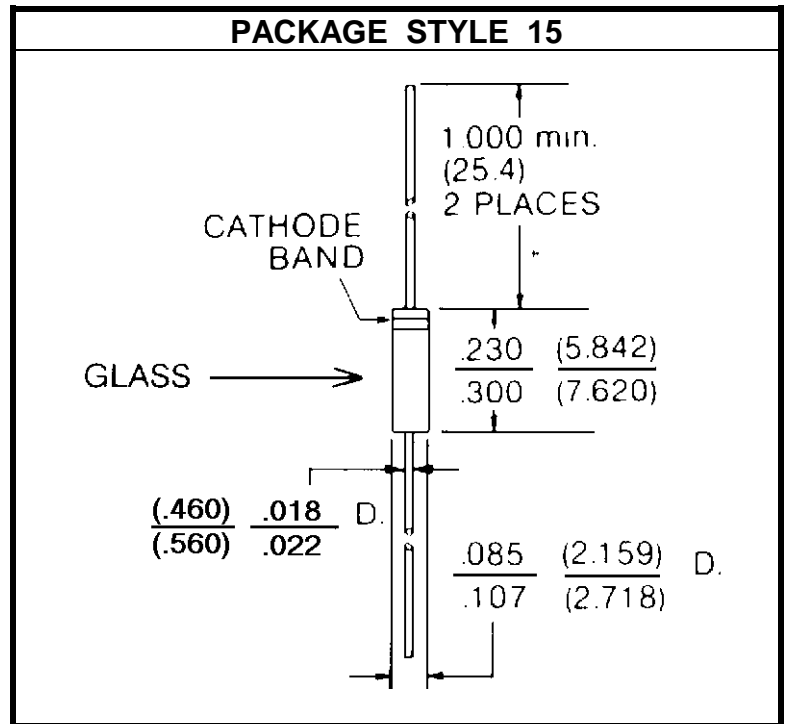
SILICON PIN DIODE

DESCRIPTION:

The **ASI 5082-3081** PIN Diode is Designed for Low Power RF Switching and Attenuating Applications.

MAXIMUM RATINGS

I	250 mA
V	100 V
P_{DISS}	250 mW @ T _C = 25 °C
T_J	-65 °C to +150 °C
T_{STG}	-65 °C to +150 °C
T_{SOLD}	260 °C for 5 sec.


CHARACTERISTICS T_C = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
V _R	I _R = 10 μA	100			V
V _F	I _F = 100 mA		1.0		V
τ	I _F = 50 mA I _R = 250 mA		2500		nS
R _S	I _F = 100 mA f = 100 MHz			3.5	Ω
C _t	V _R = 50 V f = 1.0 MHz			0.4	pF
R _H	I _F = 10 μA f = 100 MHz	1500			Ω
R _L	I _F = 20 mA f = 100 MHz			8.0	Ω

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.