


Central
Semiconductor Corp.
Central
Semiconductor Corp.
Central
Semiconductor Corp.
Central™
Semiconductor Corp.

145 Adams Avenue
Hauppauge, New York 11788

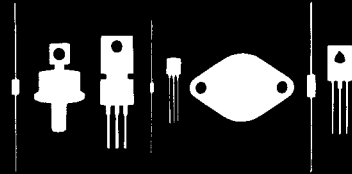

2 AMP RECTIFIER
50 - 1500 VOLTS
AXIAL LEAD EPOXY CASE

CR 2 SERIES

FEATURES

2 Amp at 50° C
Compression molded epoxy
Superior Solvent Resistance

50 Amps Surge Current
Reliable Internal Construction
Extensive Temperature Range


DESCRIPTION

The CENTRAL SEMICONDUCTOR 2 ampere axial lead epoxy Silicon Rectifier is a high quality, well-constructed, highly reliable component designed for use in all types of military, commercial, industrial, entertainment, computer, and automotive applications. Because of its superior electrical characteristics, this rectifier family is used as a universal replacement for many other rectifiers.

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

<u>Symbol</u>	<u>CR2-005</u>	<u>CR2-010</u>	<u>CR2-020</u>	<u>CR2-040</u>	<u>CR2-060</u>	<u>CR2-080</u>	<u>CR2-100</u>	<u>CR2-120</u>	<u>CR2-150</u>	<u>Unit</u>
PIV	50	100	200	400	600	800	1000	1200	1500	v
V _{rm(rms)}	35	70	140	280	420	560	700	840	1050	v
I _F (avg)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	A
I _F (surge)	50	50	50	50	50	50	50	50	50	A
VFM (at 2 A)	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	v
IRM (25°C)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	uA
T _J max	175	175	175	175	175	175	175	175	175	°C

OUTLINE DRAWING

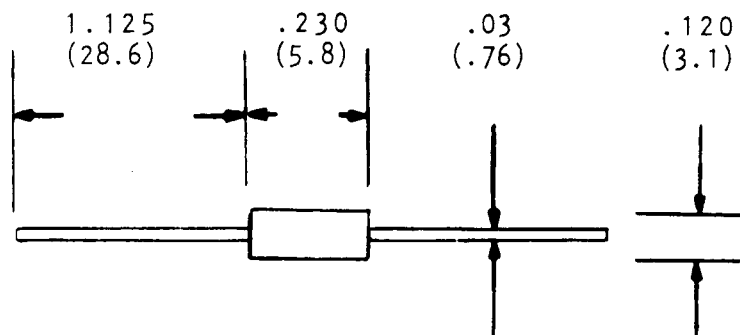

Dimensions in inches and (millimeters).

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.